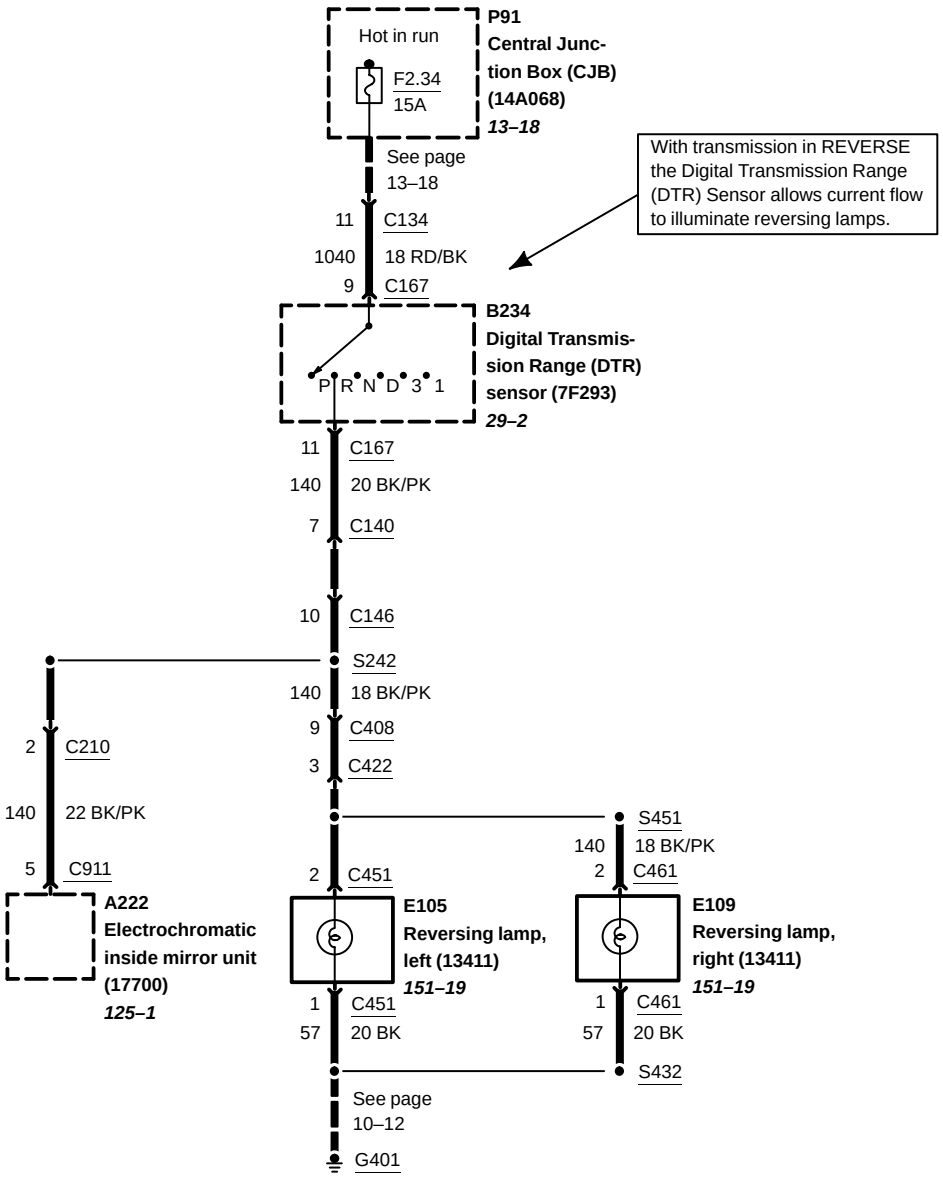
Hot in run
F2.34
15A
P91
Central Junction Box (CJB)
(14A068)
13–18
See page
13–18
With transmission in REVERSE the Digital Transmission Range (DTR) Sensor allows current flow to illuminate reversing lamps.
11
C134
1040
18 RD/BK
9
C167
B234
Digital Transmission Range (DTR) sensor (7F293)
29–2
P R N D 3 1
11
C167
140
20 BK/PK
7
C140
10
C146
S242
140
18 BK/PK
9
C408
3
C422
2
C210
140
22 BK/PK
5
C911
A222
Electrochromatic inside mirror unit
(17700)
125–1
2
C451
E105
Reversing lamp, left (13411)
151–19
1
C451
57
20 BK
S451
140
18 BK/PK
2
C461
E109
Reversing lamp, right (13411)
151–19
1
C461
57
20 BK
S432
See page
10–12
G401