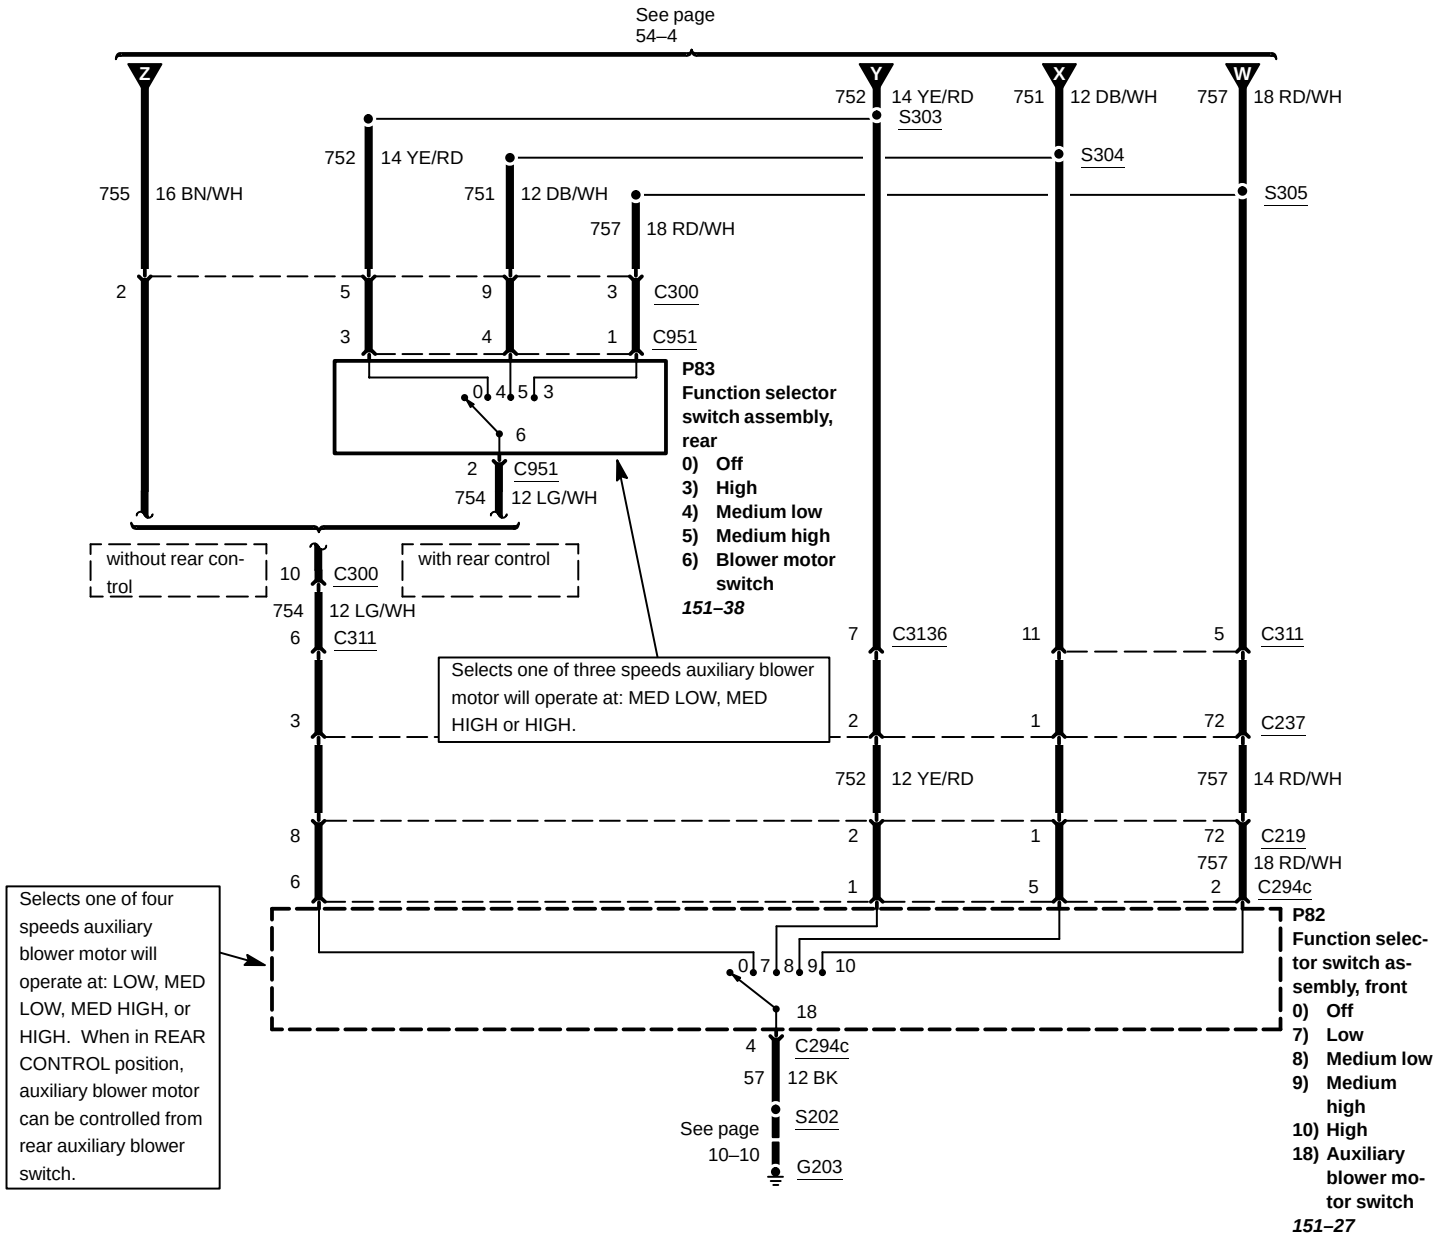
See page 54–4
Z
Y
X
W
752 14 YE/RD
751 12 DB/WH
757 18 RD/WH
S303
S304
S305
755 16 BN/WH
752 14 YE/RD
751 12 DB/WH
757 18 RD/WH
C300
C951
P83
Function selector switch assembly, rear
0) Off
3) High
4) Medium low
5) Medium high
6) Blower motor switch
151–38
754 12 LG/WH
without rear control
with rear control
C311
C3136
C237
Selects one of three speeds auxiliary blower motor will operate at: MED LOW, MED HIGH or HIGH.
752 12 YE/RD
757 14 RD/WH
C219
757 18 RD/WH
C294c
Selects one of four speeds auxiliary blower motor will operate at: LOW, MED LOW, MED HIGH, or HIGH. When in REAR CONTROL position, auxiliary blower motor can be controlled from rear auxiliary blower switch.
P82
Function selector switch assembly, front
0) Off
7) Low
8) Medium low
9) Medium high
10) High
18) Auxiliary blower motor switch
151–27
C294c
57 12 BK
S202
See page 10–10
G203