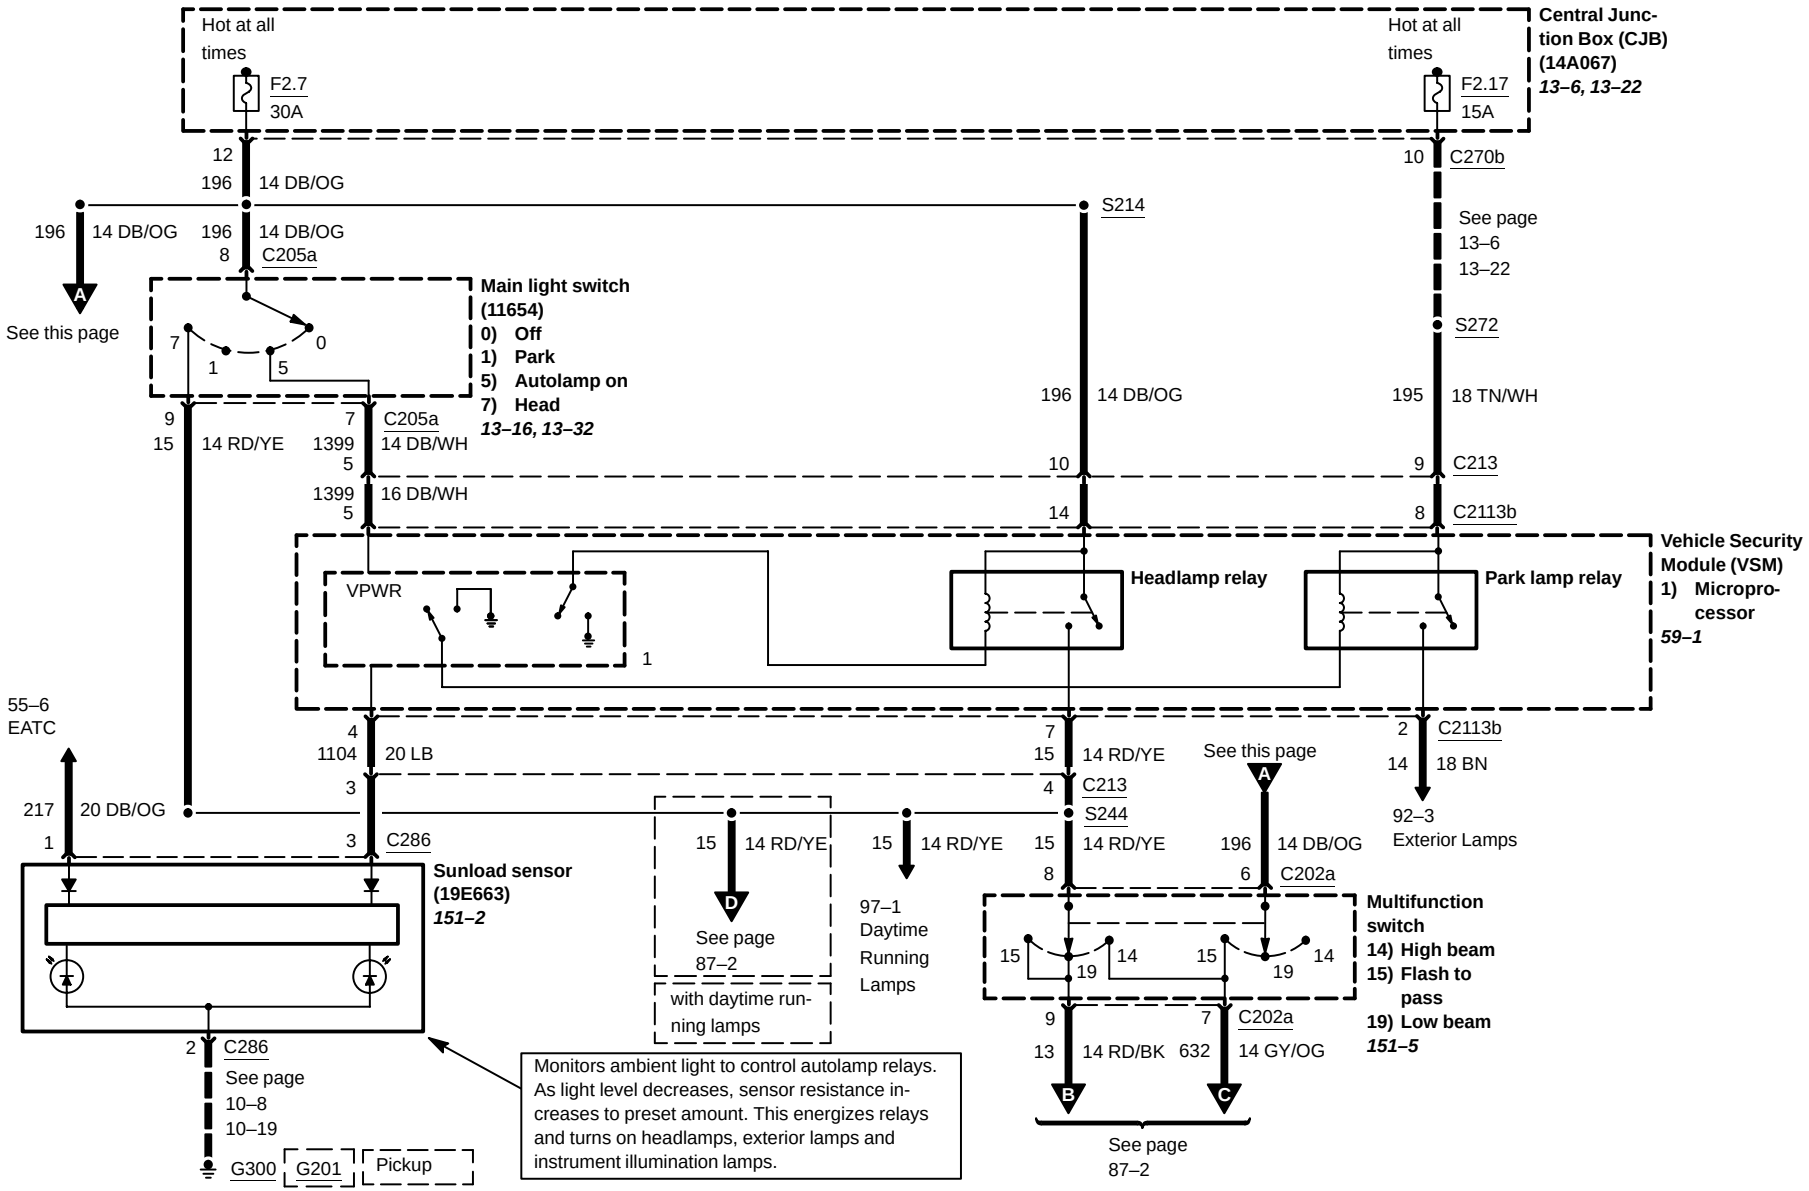
Hot at all times
F2.7
30A
Hot at all times
F2.17
15A
Central Junction Box (CJB) (14A067)
13–6, 13–22
12
196 14 DB/OG
10 C270b
See page 13–6 13–22
196 14 DB/OG
196 14 DB/OG
8 C205a
S214
A
See this page
Main light switch (11654)
0) Off
1) Park
5) Autolamp on
7) Head
13–16, 13–32
7
1
5
0
S272
9
15 14 RD/YE
7
1399 14 DB/WH
C205a
196 14 DB/OG
195 18 TN/WH
10
9 C213
1399
5 16 DB/WH
14
8 C2113b
VPWR
1
Headlamp relay
Park lamp relay
Vehicle Security Module (VSM)
1) Microprocessor
59–1
55–6 EATC
4
1104 20 LB
7
15 14 RD/YE
See this page
A
2 C2113b
14 18 BN
3
4 C213
217 20 DB/OG
1
3 C286
S244
15 14 RD/YE
D
See page 87–2
with daytime running lamps
15 14 RD/YE
97–1 Daytime Running Lamps
15 14 RD/YE
196 14 DB/OG
6 C202a
8
92–3 Exterior Lamps
Sunload sensor (19E663)
151–2
15 19 14
15 19 14
Multifunction switch
14) High beam
15) Flash to pass
19) Low beam
151–5
9
13 14 RD/BK
7
632 14 GY/OG
C202a
B
C
See page 87–2
2 C286
See page 10–8 10–19
G300
G201
Pickup
Monitors ambient light to control autolamp relays. As light level decreases, sensor resistance increases to preset amount. This energizes relays and turns on headlamps, exterior lamps and instrument illumination lamps.