* Navigator
** Early production
*** Late production

C290a (BK)

14401

Radio (18806)

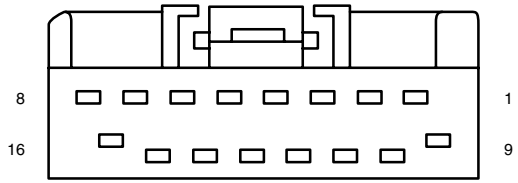

F16071

Pin	Circuit	Circuit function
1	19 (LB/RD)	Illumination, Power
	*235 (RD/BK)	Instrument illumination, feed
2	57 (BK)	Ground, Illumination
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	57 (BK)	Ground, clock select
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	**1499 (PK/LG)	Accessory delay relay, output
	***194 (PK)	Accessory delay relay, output
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground, audio

C290b (BK)

14401

Radio (18806)

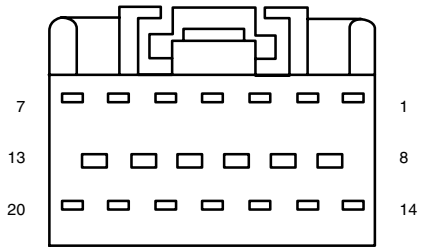

F20055

Pin	Circuit	Circuit function
1	689 (DB)	Parking aid, mute, signal
2	–	not used
3	–	not used
4	–	not used
5	1068 (LG/BK)	Audio System ON (ASYSON)
6	832 (LB/PK)	Audio corporate protocol A
7	833 (TN)	Audio corporate protocol B
8	–	not used
9	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	595 (LB/RD)	Audio/climate control switch, Radio (18806), signal
15	–	not used
16	48	Shield
17	1805 (RD)	DVD player, signal, Right, +
18	1806 (BK)	DVD player, signal, Right, –
19	1803 (WH)	DVD player, signal, Left, +
20	1804 (LG)	DVD player, signal, Left, –