C135

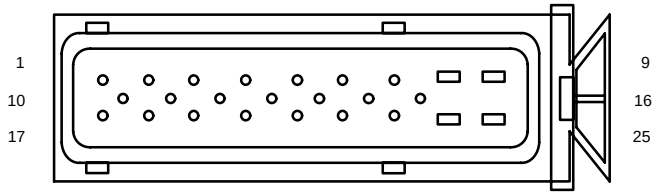

Pin	Circuit	Circuit Function
1	70 (LB/WH)	ISO Bus
2	–	not used
3	–	not used
4	522 (TN/PK)	Wheel speed sensor, left front (2C205) –
5	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
6	519 (LG/BK)	Rear axle speed sensor (4B409) –
7	–	not used
8	530 (LG/YE)	Chassis Ground
9	532 (OG/YE)	Voltage supplied at all times (overload protected)
10	512 (TN/LG)	Brake indicator, prove–out
11	–	not used
12	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
13	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
14	523 (RD/PK)	Rear axle speed sensor (4B409) +
15	603 (DG)	Anti–lock brake indicator, control
16	533 (TN/RD)	Voltage supplied in Start and Run (overload protected)
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	530 (LG/YE)	Chassis Ground
25	532 (OG/YE)	Voltage supplied at all times (overload protected)

C139

12A581



14405



(1) 53 (BK/LB)
(2) 52 (YE)
(3) 64 (DG)
(4) 5 (OG/LB)
(5) 511 (LG)
(6) 140 (BK/PK)
(7) 14 (BN)
(8) 9 (LG/OG)