C289

14401

M256
Temperature blend
door actuator
(19E616)



F08059

Pin	Circuit	Circuit function
1	436 (RD/LG)	Air temperature door variable resistor +
2	437 (YE/LG)	Air temperature door variable resistor, wiper
3	–	not used
4	–	not used
5	57 (BK)	Ground
6	295 (LB/PK)	Voltage in Run (overload protected)
7	438 (RD/WH)	Air temperature door variable resistor –
8	–	not used

C290

14401

A11
Radio (18806)

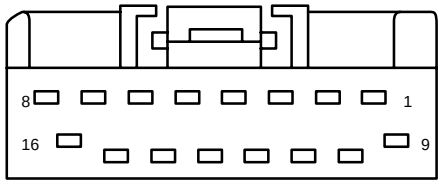

F16071

Pin	Circuit	Circuit function
1	19 (LG/RD)	Illumination, Power
2	57 (BK)	Illumination, Ground
3	1000 (RD/BK)	Voltage supplied in Start (overload protected)
4	–	not used
5	802 (OG/RD)	Speaker, right rear (18808) +
6	803 (BN/PK)	Speaker, right rear (18808) –
7	805 (WH/LG)	Speaker, right front (18808) +
8	811 (DG/OG)	Speaker, right front (18808) –
9	797 (LG/VT)	Voltage supplied at all times (overload protected)
10	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	Speaker, left rear (18808) +
13	801 (TN/YE)	Speaker, left rear (18808) –
14	804 (OG/LG)	Speaker, left front (18808) +
15	813 (LB/WH)	Speaker, left front (18808) –
16	694 (BK/LG)	Ground