

C230 (GRAY)
4 WHEEL DRIVE MODE SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	57 (BK)	Ground
2	682 (DB)	Signal Return
3	780 (DB)	Electric Shift Module
4	19 (LB/RD)	Instrument Panel Lamps Feed

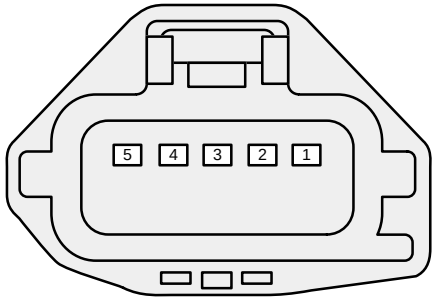

C293
TORQUE ON DEMAND (TOD) RELAY

PIN	CIRCUIT	CIRCUIT FUNCTION
1	704 (DG/LG)	Torque on Demand Relay Power
2	779 (BN)	Diode Protection from Transfer Case Shift Relays
3	976 (OG)	GEM Module
4	57 (BK)	Ground
5	294 (WH/LB)	Fused Run Feed

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C146	42-3
C174	24-9, 25-9
C182	29-5, 30-5
C238	62-6
C241	59-8
C243	13-28
C259	85-3
C267	59-7
C296	41-5