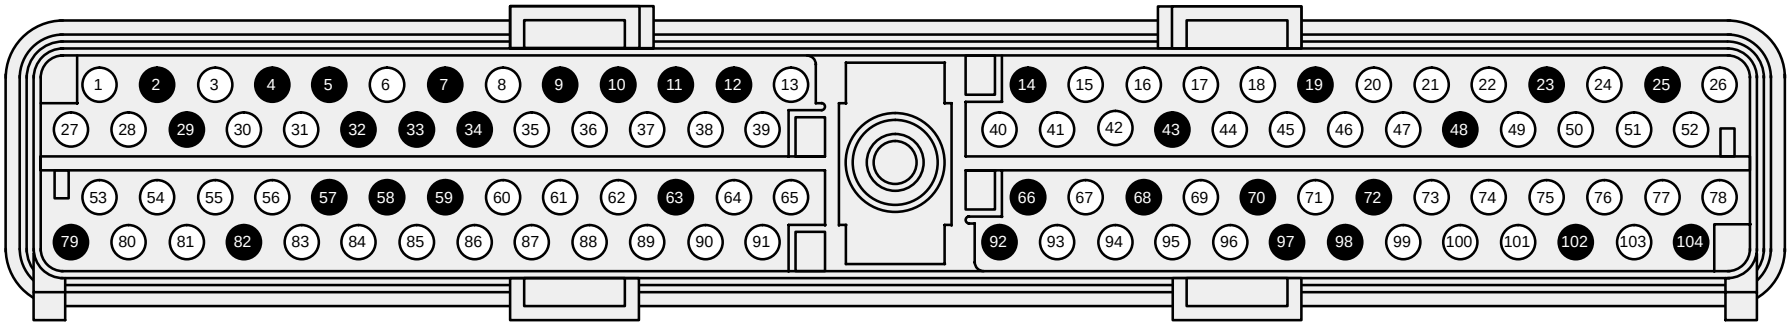

C103

POWERTRAIN CONTROL MODULE (PCM)

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
1	315 (VT/OG)	Shift Solenoid B	18	1215 (WH/LG)	TX Signal
2	–	NOT USED	19	–	NOT USED
3	1012 (OG/BK)	Digital Transmission Range (DTR) Sensor TR1	20	585 (VT)	Generator Monitor Input
			21	138 (BK/PK)	Crankshaft Position Sensor Input (+)
4	–	NOT USED	22	139 (GY/YE)	Crankshaft Position Sensor Input (–)
5	–	NOT USED	23	–	NOT USED
6	970 (DG/WH)	Turbine Shaft Speed Sensor (TSS)	24	570 (BK/WH)	Power Ground
7	–	NOT USED	25	–	NOT USED
8	659 (OG/WH)	IMRC Monitor	26	526 (DB/LG)	Ignition Coil #1 Driver
9	–	NOT USED	27	237 (OG/YE)	Shift Solenoid A
10	–	NOT USED	28	228 (DB)	Low Speed Fan Control
11	–	NOT USED	29	–	NOT USED
12	–	NOT USED	30	343 (DB/LG)	Anti-theft Indicator Input
13	107 (VT)	Data Link Connector (DLC) Reprogramming Power Supply Pin	31	330 (YE/LG)	Power Steering Pressure Switch Feed
			32	–	NOT USED
14	–	NOT USED	33	–	NOT USED
15	915 (PK/LB)	SCP Data Bus (–)	34	–	NOT USED
16	914 (TN/OG)	SCP Data Bus (+)	35	392 (RD/LG)	Heated Oxygen Sensor (HO2S) #12 Input
17	1216 (GY/OG)	RX Signal			

PIN	CIRCUIT	CIRCUIT FUNCTION	PIN	CIRCUIT	CIRCUIT FUNCTION
36	968 (TN/LB)	Mass Air Flow (MAF) Sensor Return	65	352 (BN/LG)	Differential Pressure Feedback EGR (DPFE) Sensor Input
37	923 (OG/BK)	Transmission Fluid Temperature (TFT) Sensor Input	66	–	NOT USED
38	354 (LG/RD)	Engine Coolant Temperature (ECT) Sensor Input	67	91 (VT/WH)	Canister Vent Solenoid Control
			68	–	NOT USED
39	743 (GY)	Intake Air Temperature	69	331 (PK/YE)	A/C Clutch Relay Control
40	238 (DG/YE)	Fuel Pump Monitor Input	70	–	NOT USED
41	347 (BK/YE)	A/C Clutch Cycling Switch and A/C High Pressure Cutout Switch Input	71	361 (RD)	Power (VPWR)
			72	–	NOT USED
42	367 (BN)	IMRC Control	73	559 (TN/BK)	Fuel Injector #5 Control
43	–	NOT USED	74	557 (BN/YE)	Fuel Injector #3 Control
44	1419 (LG/YE)	Starter Relay	75	555 (TN)	Fuel Injector #1 Control
45	586 (RD/PK)	Generator Communication Input	76	570 (BK/WH)	Power Ground
46	639 (LG/VT)	High Speed Fan Control	77	*570 (BK/WH)	Power Ground
47	360 (BN/PK)	EGR Vacuum Regulator (EVR) Control	78	528 (PK/WH)	Ignition Coil #3 Driver
48	–	NOT USED	79	–	NOT USED
49	1145 (LB/BK)	Digital Transmission Range (DTR) Sensor TR2	80	926 (LB/OG)	Fuel Pump Relay Control
			81	925 (WH/YE)	Electronic Pressure Control (EPC) Solenoid
50	1143 (WH/BK)	Digital Transmission Range (DTR) Sensor TR4	82	–	NOT USED
51	570 (BK/WH)	Power Ground	83	264 (WH/LB)	Idle Air Control (IAC) Valve Control
52	527 (RD/LB)	Ignition Coil #2 Driver	84	136 (DB/YE)	Output Shaft Speed (OSS) Sensor Input
53	971 (PK/BK)	Shift Solenoid C			
54	473 (RD/LB)	Torque Converter Clutch (TCC) Solenoid	85	282 (DB/OG)	Camshaft Position (CMP) Sensor Input
55	1119 (RD)	Power Feed (Hot at All Times)	86	439 (TN/LG)	A/C High Pressure Cutout Switch Input
56	191 (LG/BK)	EVAP Canister Purge Valve			
57	–	NOT USED	87	94 (RD/BK)	Heated Oxygen Sensor (HO2S) #21 Input
58	–	NOT USED			
59	–	NOT USED	88	967 (LB/RD)	Mass Air Flow (MAF) Sensor Input
60	74 (GY/LB)	Heated Oxygen Sensor (HO2S) #11 Input	89	355 (GY/WH)	Throttle Position (TP) Sensor Input
			90	351 (BN/WH)	Reference Voltage
61	393 (VT/LG)	Heated Oxygen Sensor (HO2S) #22 Input	91	359 (GY/RD)	Signal Return
			92	–	NOT USED
62	791 (RD/PK)	Fuel Tank Pressure Sensor Input	93	387 (RD/WH)	Heated Oxygen Sensor (HO2S) #11 Heater
63	–	NOT USED			
64	199 (LB/YE)	Digital Transmission Range (DTR) Sensor TR3A		**REVISED**	*** EARLY PRODUCTION**

PIN	CIRCUIT	CIRCUIT FUNCTION
94	388 (YE/LB)	Heated Oxygen Sensor (HO2S) #21 Heater
95	389 (WH/BK)	Heated Oxygen Sensor (HO2S) #12 Heater
96	390 (TN/YE)	Heated Oxygen Sensor (HO2S) #22 Heater
97	–	NOT USED
98	–	NOT USED
99	560 (LG/OG)	Fuel Injector #6 Control
100	558 (BN/LB)	Fuel Injector #4 Control
101	556 (WH)	Fuel Injector #2 Control
102	–	NOT USED
103	570 (BK/WH)	Power Ground
104	–	NOT USED

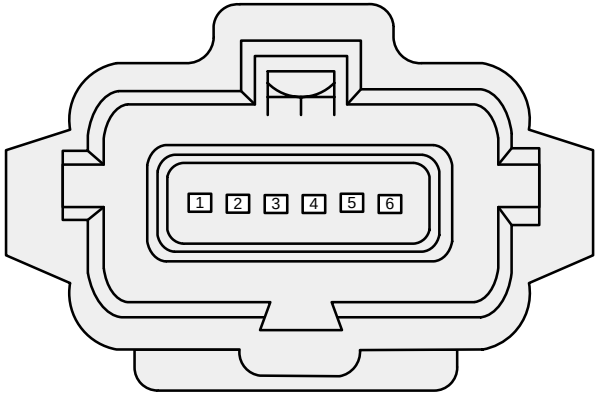

C181

MASS AIR FLOW (MAF) SENSOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	359 (GY/RD)	Signal Return
2	361 (RD)	Power
3	570 (BK/WH)	Power Ground
4	968 (TN/LB)	MAF Signal Return
5	967 (LB/RD)	MAF Signal
6	743 (GY)	Intake Air Temperature