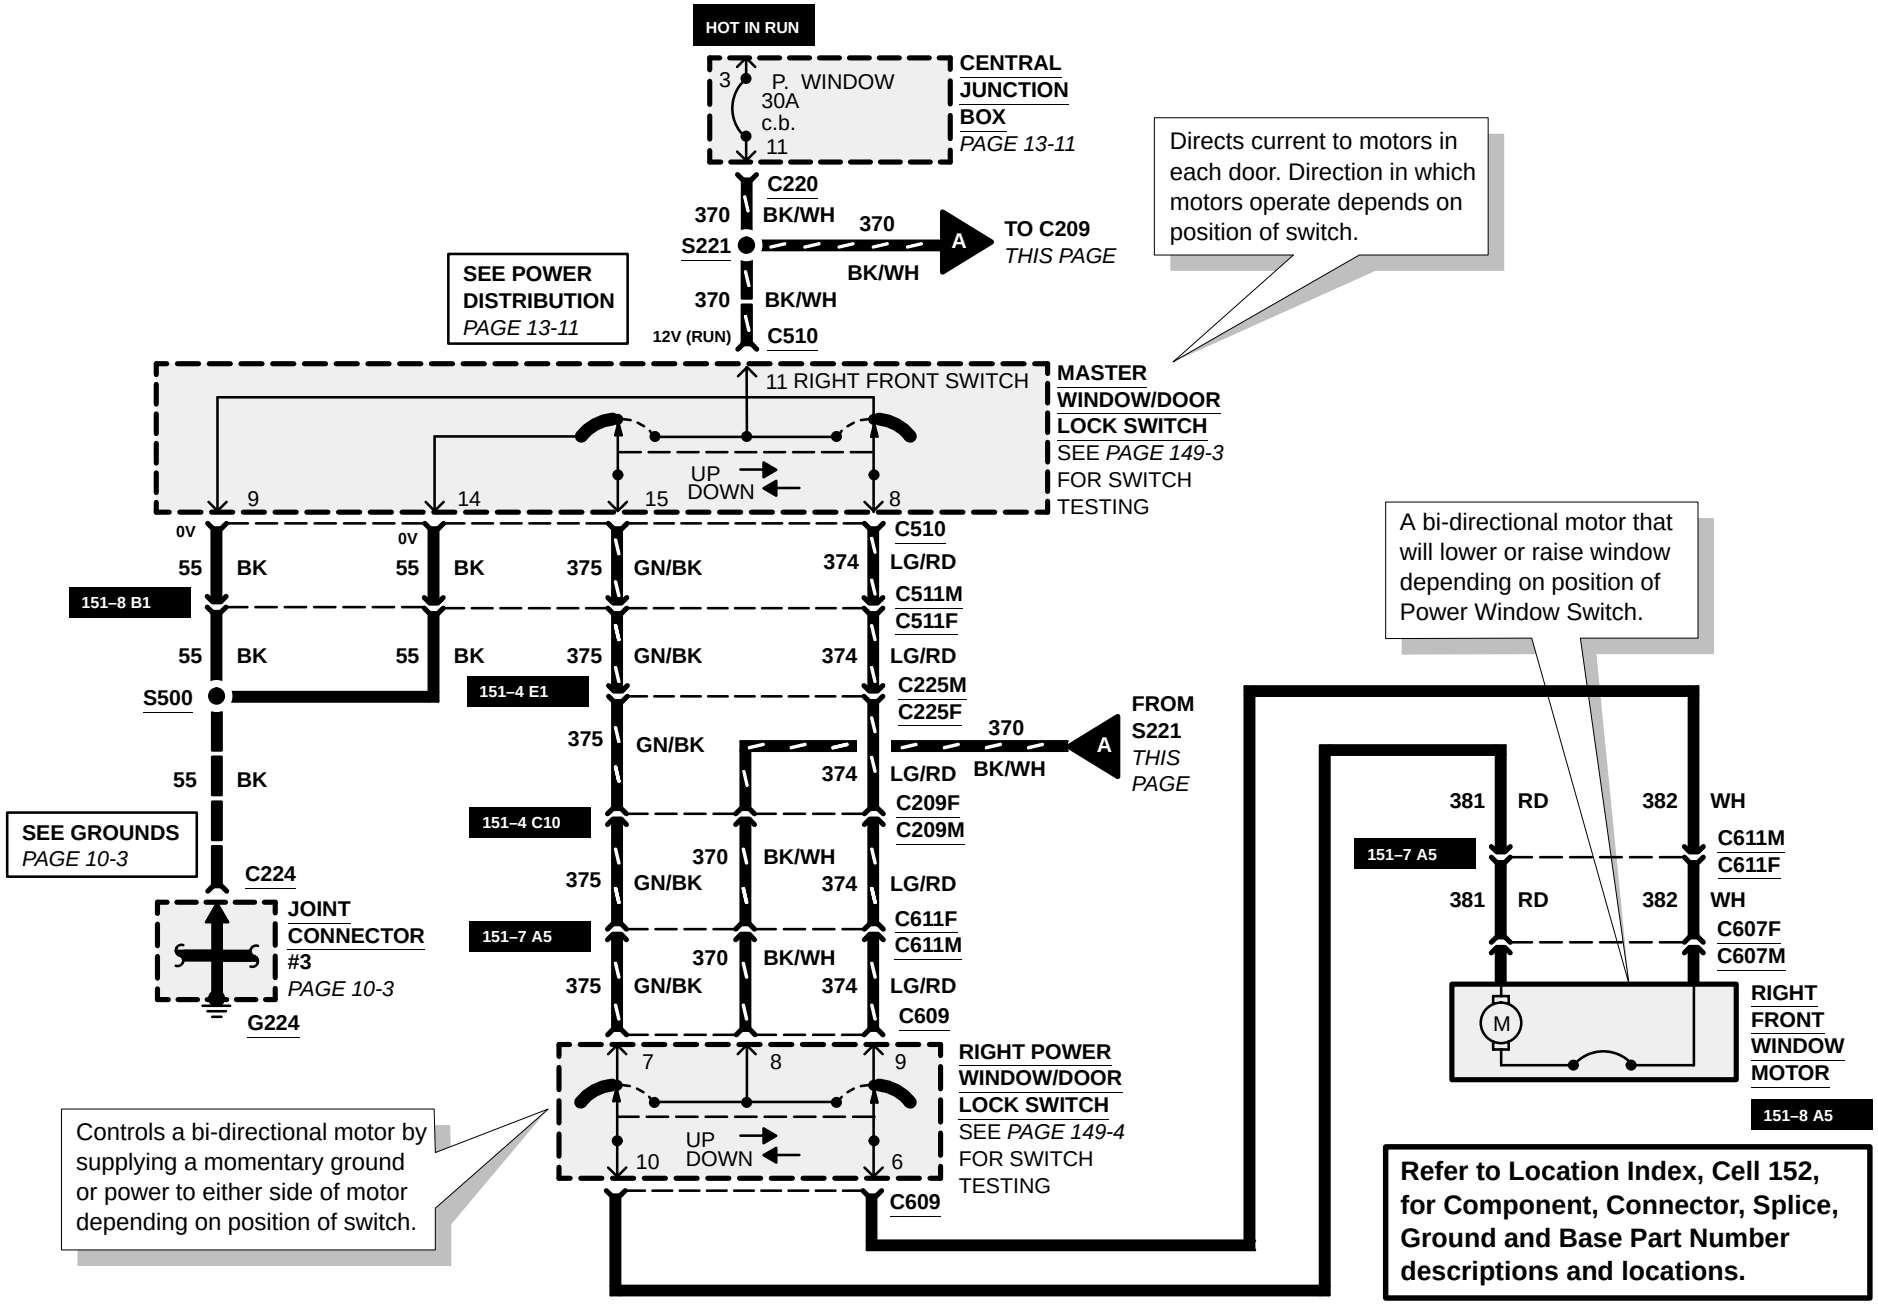
HOT IN RUN
3
P. WINDOW 30A c.b. 11
CENTRAL JUNCTION BOX
PAGE 13-11
C220
370 BK/WH
S221
370 BK/WH
A
TO C209
THIS PAGE
370 BK/WH
12V (RUN)
C510
SEE POWER DISTRIBUTION
PAGE 13-11
Directs current to motors in each door. Direction in which motors operate depends on position of switch.
11 RIGHT FRONT SWITCH
MASTER WINDOW/DOOR LOCK SWITCH
SEE PAGE 149-3 FOR SWITCH TESTING
UP
DOWN
9
14
15
8
0V
55 BK
151–8 B1
S500
SEE GROUNDS
PAGE 10-3
C224
JOINT CONNECTOR #3
PAGE 10-3
G224
375 GN/BK
374 LG/RD
C510
C511M
C511F
C225M
C225F
151–4 E1
FROM S221
THIS PAGE
C209F
C209M
151–4 C10
C611F
C611M
151–7 A5
C609
A bi-directional motor that will lower or raise window depending on position of Power Window Switch.
381 RD
382 WH
C611M
C611F
C607F
C607M
M
RIGHT FRONT WINDOW MOTOR
151–8 A5
RIGHT POWER WINDOW/DOOR LOCK SWITCH
SEE PAGE 149-4 FOR SWITCH TESTING
7
8
9
10
6
Controls a bi-directional motor by supplying a momentary ground or power to either side of motor depending on position of switch.
Refer to Location Index, Cell 152, for Component, Connector, Splice, Ground and Base Part Number descriptions and locations.