43-3 ELECTRIC VARIABLE ASSIST POWER STEERING (EVO)

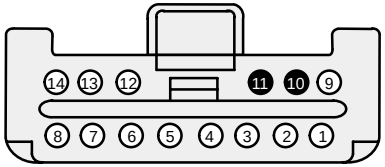

C214 (GRAY)
ELECTRONIC VARIABLE ORIFICE (EVO) STEERING MODULE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	633 (RD)	Steering Wheel Rotation Rate Input
2	844 (GY/RD)	Diagnostic Input
3	419 (DG/LG)	Diagnostic Input
4	432 (BK/PK)	Ground
5	57 (BK)	Ground
6	634 (BN)	Steering Wheel Rotation Rate Input
7	298 (VT/OG)	Power (Hot in Run)
8	676 (PK/OG)	Vehicle Speed Sensor (VSS) Signal Input (–)
9	679 (GY/BK)	Vehicle Speed Sensor (VSS) Signal Input (+)
10	–	NOT USED
11	–	NOT USED
12	837 (YE/BK)	Steering Wheel Rotation Sensor Ground
13	86 (GY/OG)	Electronic Variable Orifice (EVO) Actuator Control (+)
14	87 (TN/YE)	Electronic Variable Orifice (EVO) Actuator Control (–)

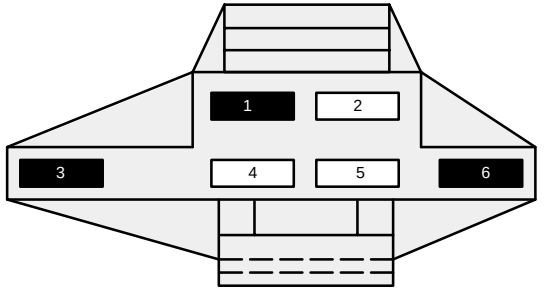

C411 (GRAY)

EVO TEST CONNECTOR

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	432 (BK/PK)	Ground
3	–	NOT USED
4	419 (DG/LG)	Diagnostic Input
5	844 (GY/RD)	Diagnostic Input
6	–	NOT USED

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C215	41-3
C216	41-3