REVISED

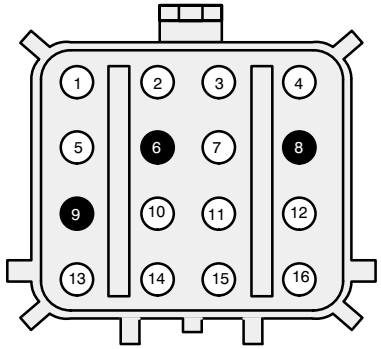

C157

CUMMINS ENGINE CONTROL INTERFACE

PIN	CIRCUIT	CIRCUIT FUNCTION
1	16 (RD/LG)	Power (Hot in Start or Run)
2	361 (RD)	Power (Hot at All Times)
3	785 (BK/LG)	Power (Hot at All Times)
4	785 (BK/LG)	Power (Hot at All Times)
5	787 (PK/BK)	Feed from VP44 Relay
6	–	NOT USED
7	926 (LB/OG)	To VP44 Relay Coil
8	–	NOT USED
9	–	NOT USED
10	794 (LB)	Low Coolant Sensor
11	347 (BK/YE)	A/C Clutch Control
12	570 (BK/WH)	Ground
13	570 (BK/WH)	Ground
14	570 (BK/WH)	Ground
15	570 (BK/WH)	Ground
16	386 (LB)	A/C High Pressure Switch

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C200	13-33
C201	13-34
C213	60-7
C214	60-8
C215	60-7
C247	59-7