C228b

14401

A205
Electronic Automatic Temperature Control (EATC) module (19980)

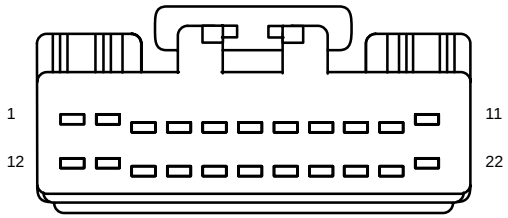

F22017

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	693 (OG)	UBP Diagnostics
4	–	not used
5	470 (PK/BK)	Sensor signal return (reference/ground)
6	438 (RD/WH)	Blend door actuator, signal –
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	22 (LB/BK)	Voltage supplied at all times (overload protected)
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used
17	–	not used
18	348 (VT)	A/C demand signal
19	250 (OG)	Blend door actuator, control
20	249 (DB/LG)	Blend door actuator, control
21	–	not used
22	296 (WH/VT)	Voltage in Run (overload protected)

C233

14401

B206
In–vehicle temperature sensor (19C734)



F03032

Pin	Circuit	Circuit function
1	790 (WH/OG)	signal from Electronic Automatic Temperature Control (EATC) module (19980)
2	–	not used
3	470 (PK/BK)	Sensor signal return (reference/ground)

C241

14401

N10
Rear window defrost switch (18578)



F08060

Pin	Circuit	Circuit function
1	676 (PK/OG)	Ground
2	1010 (DB/OG)	Rear window defrost switch (18578), input
3	–	not used
4	57 (BK)	Illumination Ground
5	–	not used
6	59 (DG/VT)	Fused rear window defrost relay, switched power
7	–	not used
8	19 (LB/RD)	Illumination +