C135

12A581

ABS control module
(2C219)

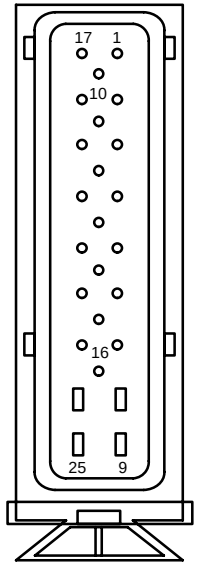

F25010

* 6.0L Diesel
** all others

Pin	Circuit	Circuit function
1	70 (LB/WH)	Data bus ISO 9141 (K–line)
2	810 (RD/LG)	Brake pedal position switch (13480), input
3	–	not used
4	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
5	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
6	519 (LG/BK)	Rear axle speed sensor (4B409) –
7	210 (LB)	Four–wheel drive, high/low
8	530 (LG/YE)	Chassis Ground
9	532 (OG/YE)	Voltage supplied at all times (overload protected)
10	512 (TN/LG)	Brake fluid level switch (2L414), input
11	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
12	521 (TN/OG)	Wheel speed sensor, left front (2C205) +

Pin	Circuit	Circuit function
13	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
14	523 (RD/PK)	Wheel speed sensor, right rear +
15	603 (DG)	Anti–lock brake indicator, control
16	*1155 (YE/BK)	Voltage in Run (overload protected)
16	**533 (TN/RD)	Voltage in Run (overload protected)
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	530 (LG/YE)	Chassis Ground
25	532 (OG/YE)	Voltage supplied at all times (overload protected)