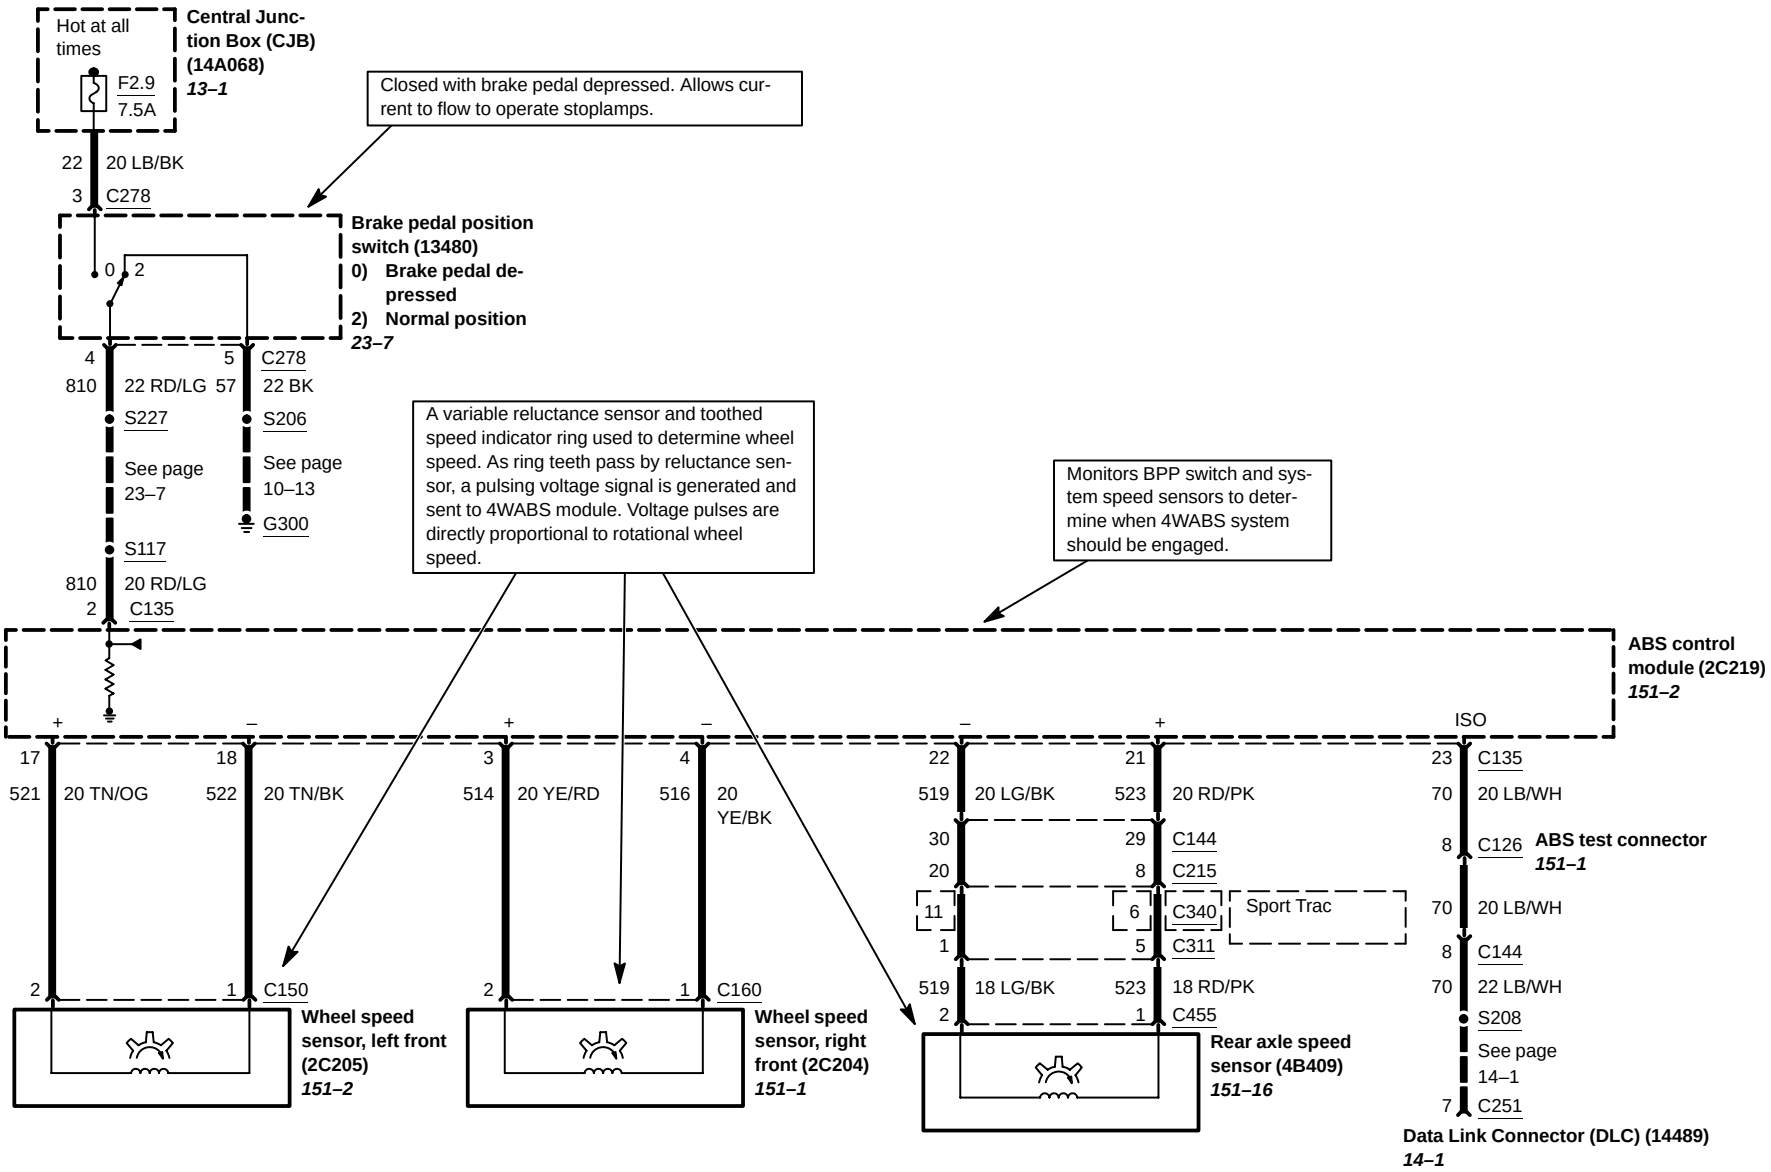
Hot at all times
F2.9
7.5A
Central Junction Box (CJB) (14A068)
13–1
22 20 LB/BK
3 C278
Closed with brake pedal depressed. Allows current to flow to operate stoplamps.
Brake pedal position switch (13480)
0) Brake pedal depressed
2) Normal position
23–7
0 2
4 810 22 RD/LG S227
See page 23–7
S117
810 20 RD/LG 2 C135
5 C278 57 22 BK S206
See page 10–13
G300
A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational wheel speed.
Monitors BPP switch and system speed sensors to determine when 4WABS system should be engaged.
ABS control module (2C219)
151–2
+ – + – – + ISO
17 521 20 TN/OG 18 522 20 TN/BK
3 514 20 YE/RD 4 516 20 YE/BK
22 519 20 LG/BK 21 523 20 RD/PK
30 29 C144
20 8 C215
11 6 C340 Sport Trac
1 5 C311
519 18 LG/BK 523 18 RD/PK
2 1 C455
23 C135
70 20 LB/WH
8 C126 ABS test connector
151–1
70 20 LB/WH
8 C144
70 22 LB/WH
S208
See page 14–1
7 C251
Data Link Connector (DLC) (14489)
14–1
2 1 C150
Wheel speed sensor, left front (2C205)
151–2
2 1 C160
Wheel speed sensor, right front (2C204)
151–1
Rear axle speed sensor (4B409)
151–16