C2129

14401

K53
Headlamp relay



F05110

Pin	Circuit	Circuit function
1	196 (DB/OG)	Voltage supplied at all times (overload protected)
2	7 (LG/YE)	Headlamp relay, to, Central security module
3	196 (DB/OG)	Voltage supplied at all times (overload protected)
4	–	not used
5	15 (RD/YE)	Headlamp relay, output

C2189

14401

K386
Transfer case electric clutch relay



F05110

Pin	Circuit	Circuit function
1	294 (WH/LB)	Voltage in Run (overload protected)
2	976 (OG)	Transfer case electric clutch relay, control
3	704 (DG/LG)	Voltage supplied at all times (overload protected)
4	–	not used
5	779 (BN)	Transfer case electric clutch relay, output

C2191

14401

K136
Transfer case relay module

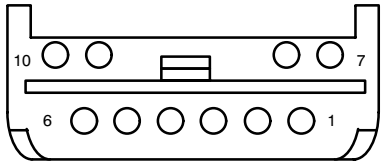

F10009

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	–	not used
3	704 (DG/LG)	Voltage supplied at all times (overload protected)
4	–	not used
5	704 (DG/LG)	Voltage supplied at all times (overload protected)
6	–	not used
7	777 (YE)	Transfer case relay module, to, Transfer case assembly
8	782 (BN/WH)	Transfer case relay module, to, Generic Electronic Module (GEM) (14B205)
9	781 (OG/LB)	Transfer case relay module, to, Generic Electronic Module (GEM) (14B205)
10	778 (OG)	Transfer case relay module, to, Transfer case assembly

C2193a

A2–521

N453
Indicator light switch



F01145

Pin	Circuit	Circuit function
1	G052 (DG)	Indicator light switch, feed