EXCURSION

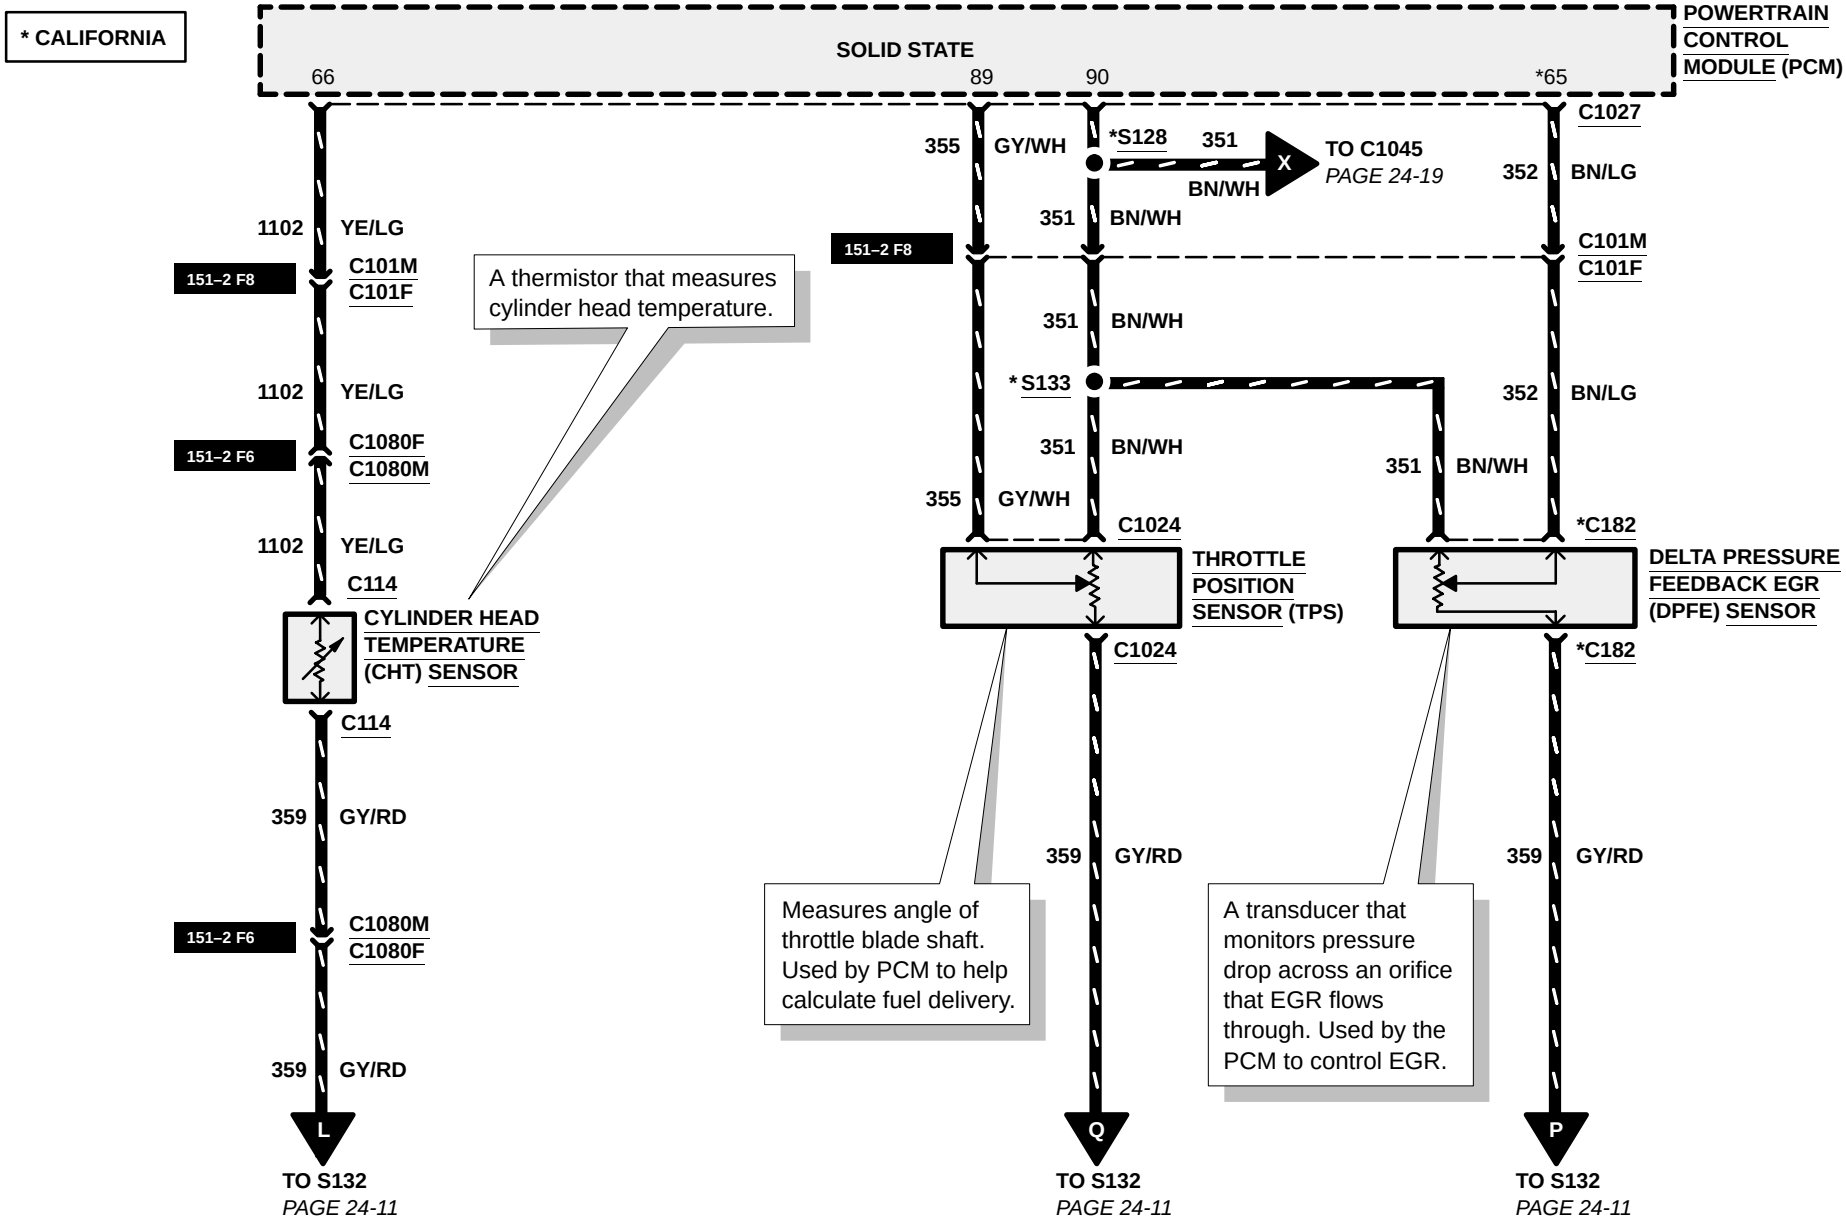
* CALIFORNIA
SOLID STATE
POWERTRAIN CONTROL MODULE (PCM)
66
89
90
*65
C1027
355 GY/WH
*S128
351 BN/WH
X
TO C1045
PAGE 24-19
352 BN/LG
351 BN/WH
1102 YE/LG
151–2 F8
C101M
C101F
151–2 F8
C101M
C101F
A thermistor that measures cylinder head temperature.
351 BN/WH
*S133
352 BN/LG
1102 YE/LG
151–2 F6
C1080F
C1080M
351 BN/WH
351 BN/WH
355 GY/WH
C1024
*C182
1102 YE/LG
C114
THROTTLE POSITION SENSOR (TPS)
DELTA PRESSURE FEEDBACK EGR (DPFE) SENSOR
CYLINDER HEAD TEMPERATURE (CHT) SENSOR
C1024
*C182
C114
359 GY/RD
359 GY/RD
359 GY/RD
151–2 F6
C1080M
C1080F
Measures angle of throttle blade shaft. Used by PCM to help calculate fuel delivery.
A transducer that monitors pressure drop across an orifice that EGR flows through. Used by the PCM to control EGR.
359 GY/RD
L
Q
P
TO S132
PAGE 24-11
TO S132
PAGE 24-11
TO S132
PAGE 24-11