C110 (BK)

14A005

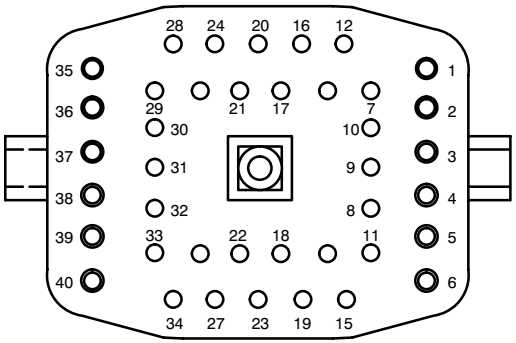

F40009

14398

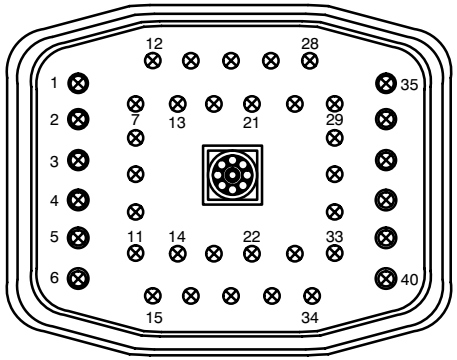

F40007

(1)	28 (BK/PK)	(11)		(21)		(31)	
(2)	276 (BN)	(12)		(22)	914 (TN/OG)	(32)	
(3)	58 (WH)	(13)		(23)		(33)	133 (BK)
(4)	56 (DB/OG)	(14)		(24)	636 (OG)	(34)	
(5)	65 (DG)	(15)		(25)	162 (LG/RD)	(35)	
(6)	61 (YE/RD)	(16)		(26)	915 (PK/LB)	(36)	
(7)	1050 (LG/VT)	(17)		(27)	151 (LB/BK)	(37)	
(8)	57 (BK)	(18)	977 (VT/WH)	(28)		(38)	
(9)		(19)		(29)		(39)	
(10)	191 (LG/BK)	(20)		(30)		(40)	

C111

12A581

P66
Coil On Plug (COP)
1 (12029)

F02109

Pin	Circuit	Circuit Function
1	1024 (LG/WH)	Coil On Plug (COP) 1 (12029), control
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)

C112

12A581

P67
Coil On Plug (COP)
2 (12029)

F02109

Pin	Circuit	Circuit Function
1	1026 (PK/WH)	Coil On Plug (COP) 2 (12029), control
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)

C113

12A581

P68
Coil On Plug (COP)
3 (12029)

F02109

Pin	Circuit	Circuit Function
1	1028 (WH/PK)	Coil On Plug (COP) 3 (12029), control
2	16 (RD/LG)	Voltage supplied in Start and Run (overload protected)