

C331
HANDSET

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	709 (GY)	Receiver Audio to Handset
3	712 (OG)	C-Data
4	711 (RD)	T-Data
5	718 (BK)	Handset Logic Ground
6	708 (DG)	Transmit Audio On/Off
7	–	NOT USED
8	717 (TN)	Handset Audio Ground
9	710 (LB)	Regulated 9-6 Volts
10	716 (YE)	R-Data
11	1271 (PK)	Remote (+)
12	1272 (WH)	Remote (–)



C495
CELLULAR TELEPHONE
TRANSCEIVER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	708 (DG)	Transmit Audio On/Off
2	–	NOT USED
3	694 (BK/LG)	Ground
4	828 (VT/LB)	Power (Hot at All Times)
5	964 (DB/LG)	Power (Hot at All Times)
6	709 (GY)	Receiver Audio to Handset
7	713 (WH)	Mic Audio Ground
8	714 (VT)	Mic Audio
9	828 (VT/LG)	Power (Hot at All Times)
10	694 (BK/LG)	Ground
11	716 (YE)	R-Data
12	–	NOT USED

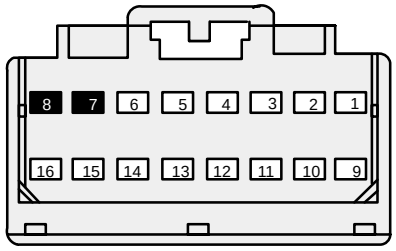

C494
CELLULAR TELEPHONE
TRANSCEIVER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	1271 (PK)	Remote (–)
2	710 (LB)	Regulated 9-6 volts
3	48	Audio Shield
4	723 (GY/RD)	Phone Trims Active
5	711 (RD)	T-Data
6	712 (OG)	C-Data
7	–	NOT USED
8	–	NOT USED
9	832 (LB/PK)	Audio Bus
10	833 (TN)	Audio Bus
11	1272 (WH)	Remote (+)
12	718 (BK)	Handset Logic Ground
13	717 (TN)	Handset Audio Ground
14	724 (LB/YE)	Phone (–)
15	725 (PK)	Phone (+)
16	48	Audio Shield

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C258	130-7