A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS control module. Voltage pulses are directly proportional to rotational wheel speed.

EXCEPT STRIPPED CHASSIS

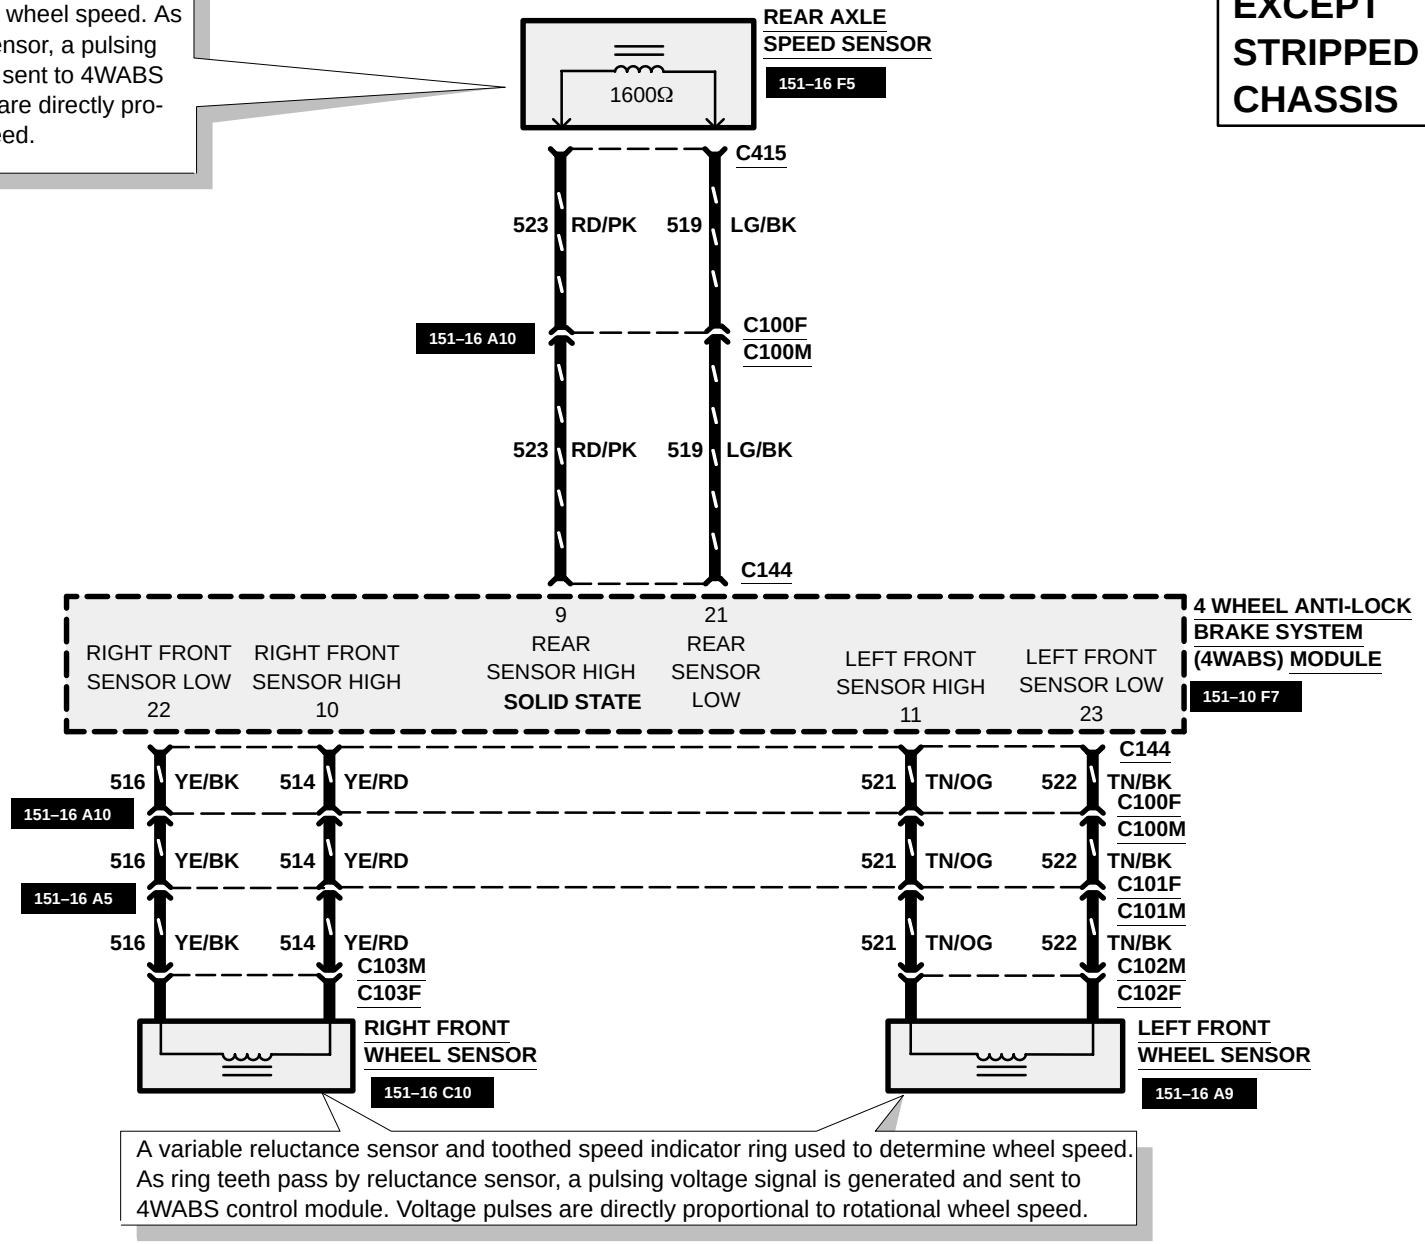

A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS control module. Voltage pulses are directly proportional to rotational wheel speed.