C501b

14A005

A215
Driver Door Module

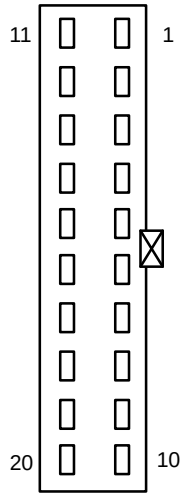

F20043

Pin	Circuit	Circuit Function
1	316 (YE/LB)	Window switch, feed, left rear, Up
2	317 (GY/OG)	Window switch, feed, left rear, Down
3	121 (YE/BK)	Key pad button 5/6, output
4	122 (YE)	Key pad button 7/8, output
5	314 (TN/LB)	Window switch, feed, right front, Down
6	313 (WH/YE)	Window switch, feed, right front, Up
7	320 (RD/BK)	Window switch, feed, right rear, Down
8	319 (YE/BK)	Window switch, feed, right rear, Up
9	120 (PK/LG)	Door unlock
10	170 (RD/LB)	Window lockout, switched power, output
11	66 (LB)	Key pad illumination
12	–	not used
13	123 (RD)	Key pad button 9/0, output
14	79 (LG/RD)	Key pad button 3/4, output
15	–	not used
16	78 (LB/YE)	Key pad button 1/2, output
17	119 (PK/YE)	Door lock
18	25 (DG/VT)	Anti–theft, disarm
19	–	not used
20	867 (DB)	Door ajar switch, left front

C501c

A215
Driver Door Module

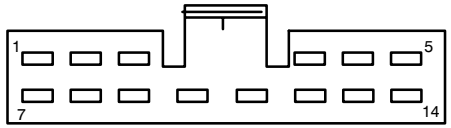

F14043

Pin	Circuit	Circuit Function
1	118 (PK/OG)	Door unlock, output
2	–	not used
3	117 (PK/BK)	Door lock, output
4	163 (RD/OG)	driver door, Unlock, output
5	–	not used
6	51 (BK/WH)	Voltage supplied at all times (overload protected)
7	57 (BK)	Ground
8	–	not used
9	–	not used
10	–	not used
11	116 (RD/BK)	Voltage supplied at all times (overload protected)
12	914 (TN/OG)	SCP Bus +
13	915 (PK/LB)	SCP Bus –
14	875 (BK/LB)	Ground