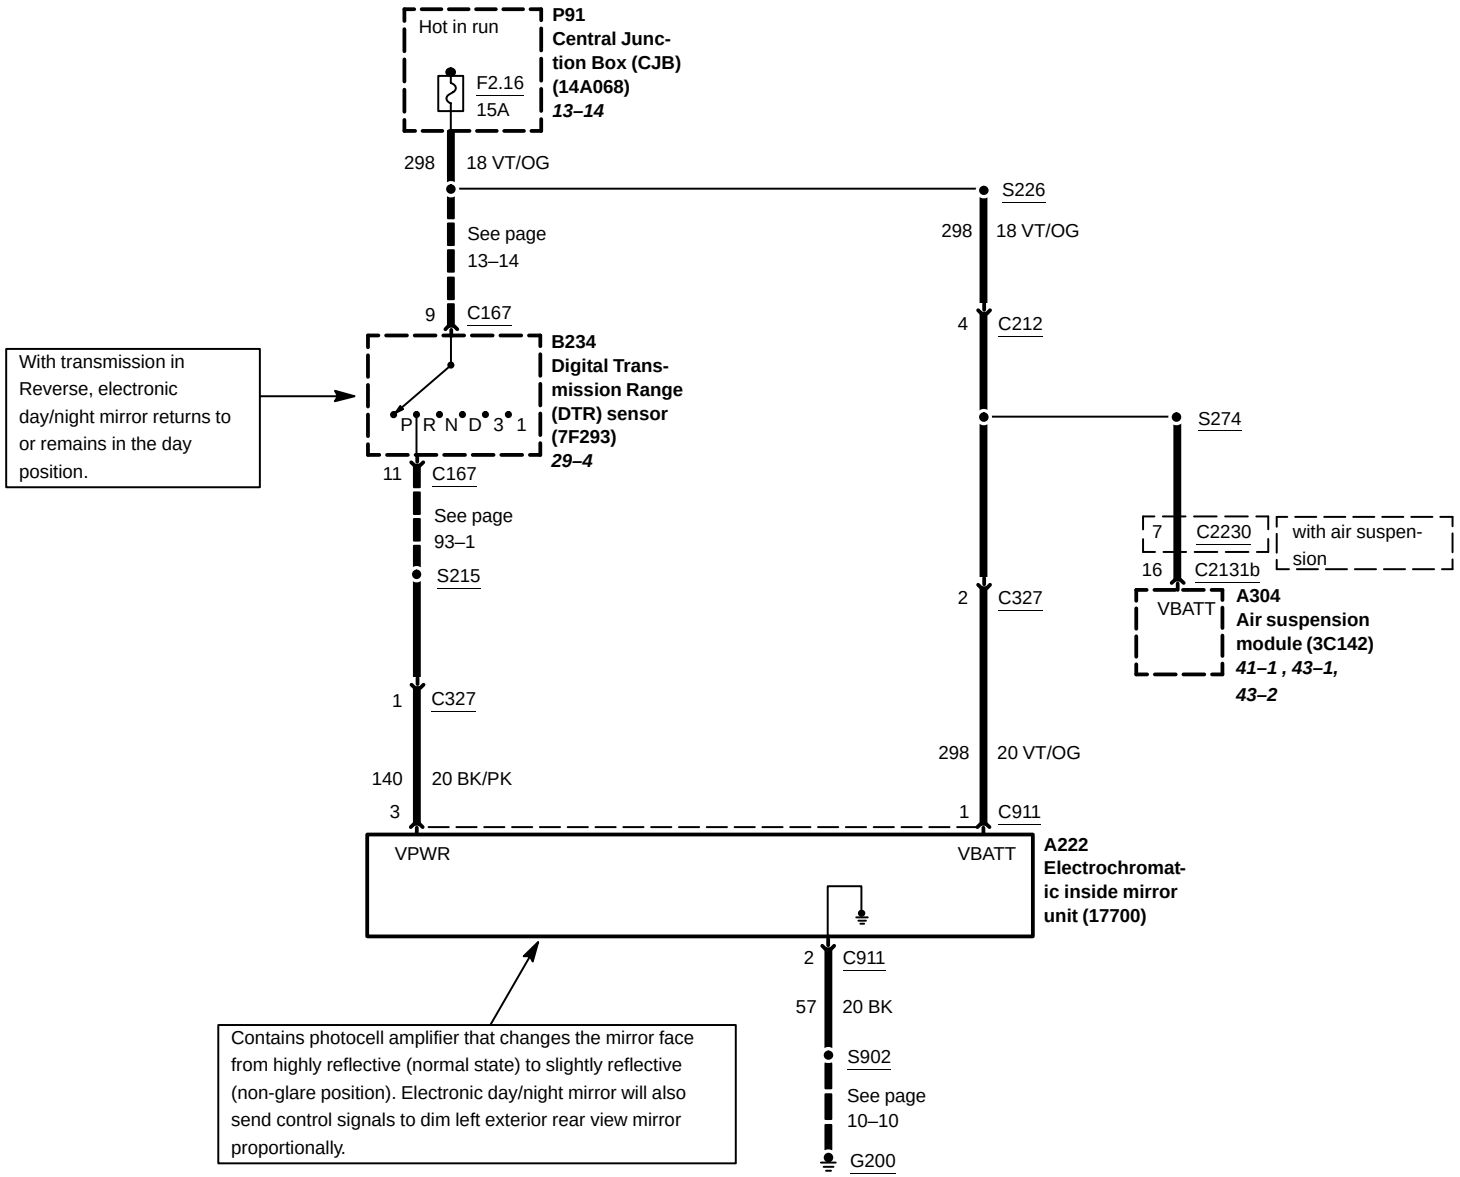
Hot in run
F2.16
15A
P91
Central Junction Box (CJB)
(14A068)
13–14
298
18 VT/OG
S226
See page
13–14
298
18 VT/OG
9
C167
4
C212
With transmission in Reverse, electronic day/night mirror returns to or remains in the day position.
B234
Digital Transmission Range (DTR) sensor
(7F293)
29–4
P R N D 3 1
S274
11
C167
7
C2230
with air suspension
See page
93–1
16
C2131b
S215
2
C327
VBATT
A304
Air suspension module (3C142)
41–1 , 43–1,
43–2
1
C327
298
20 VT/OG
140
20 BK/PK
3
1
C911
VPWR
VBATT
A222
Electrochromatic inside mirror unit (17700)
2
C911
57
20 BK
S902
See page
10–10
G200
Contains photocell amplifier that changes the mirror face from highly reflective (normal state) to slightly reflective (non-glare position). Electronic day/night mirror will also send control signals to dim left exterior rear view mirror proportionally.