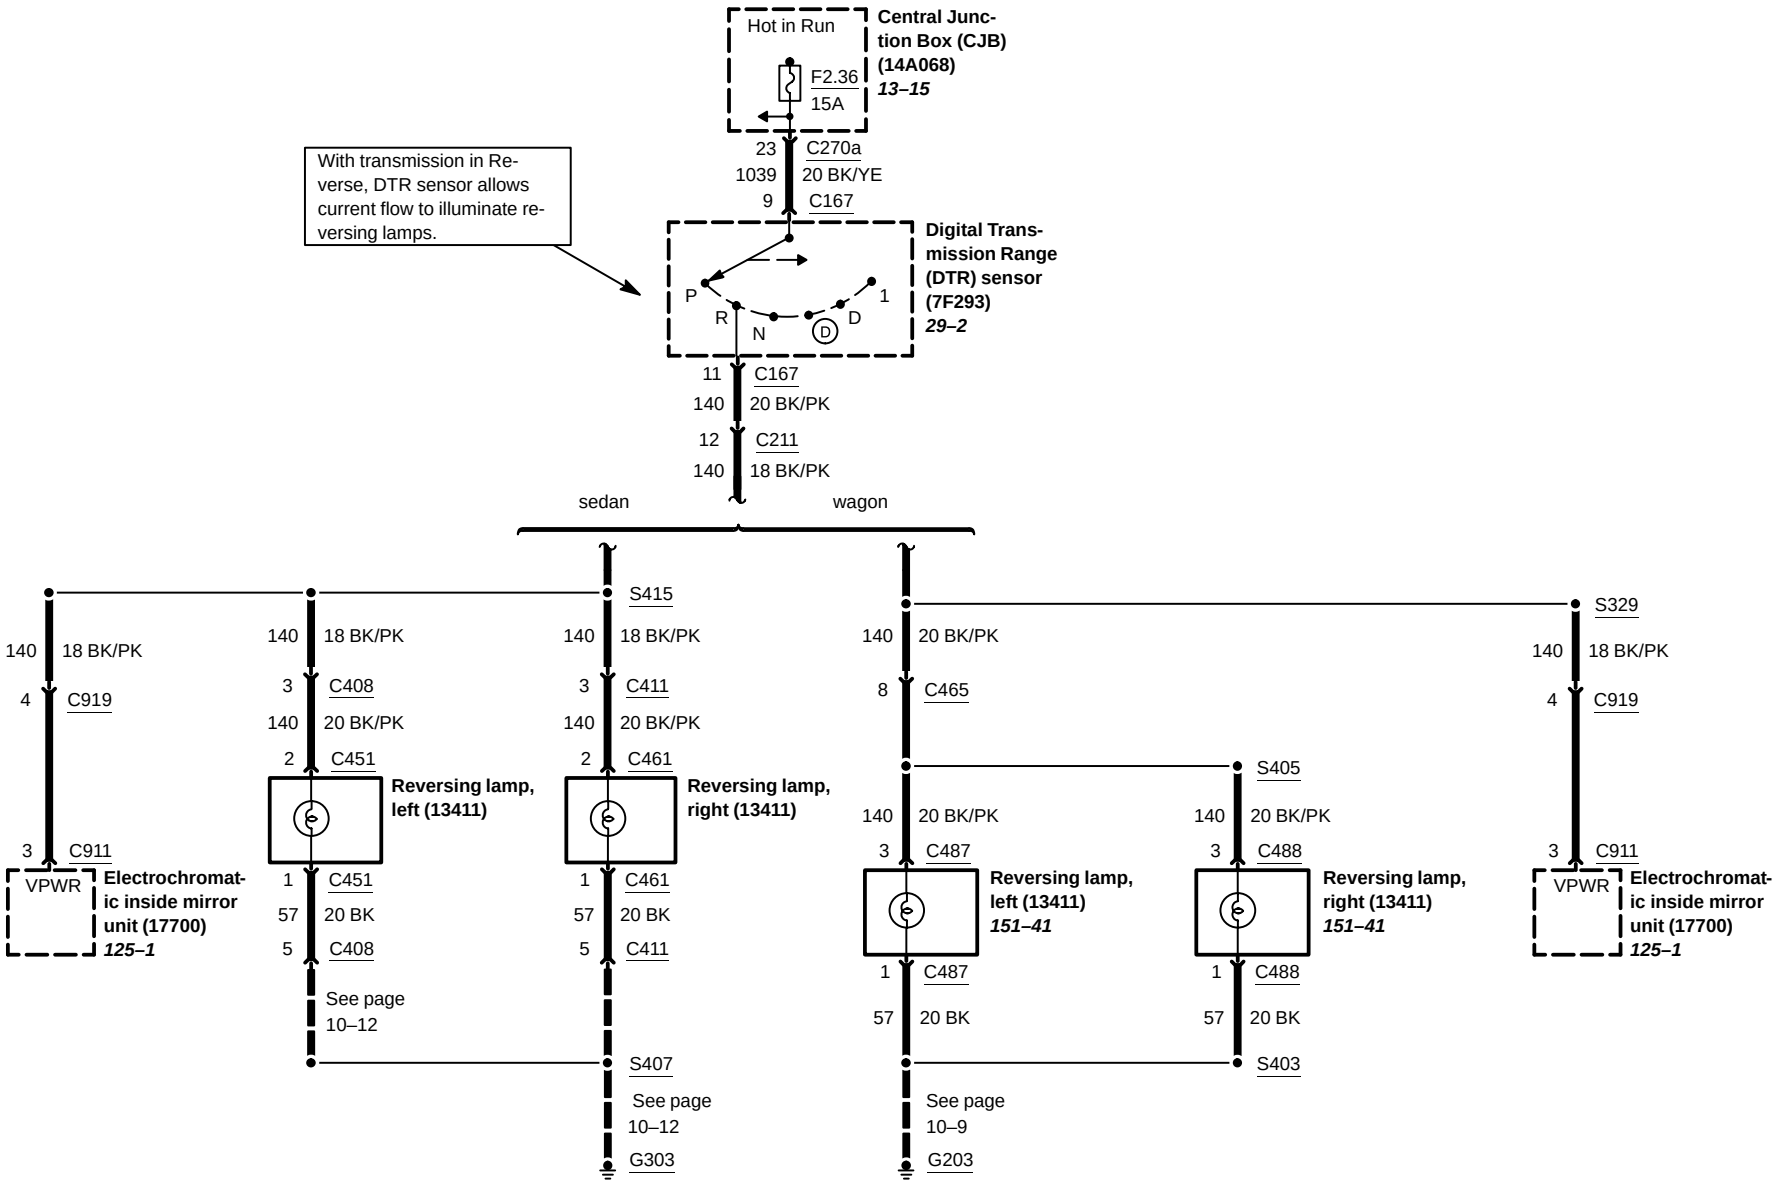
Hot in Run
F2.36
15A
Central Junction Box (CJB) (14A068)
13–15
23
1039
9
C270a
20 BK/YE
C167
With transmission in Reverse, DTR sensor allows current flow to illuminate reversing lamps.
P
R
N
D
1
Digital Transmission Range (DTR) sensor (7F293)
29–2
11
140
C167
20 BK/PK
12
140
C211
18 BK/PK
sedan
wagon
140
18 BK/PK
4
C919
3
C911
VPWR
Electrochromatic inside mirror unit (17700)
125–1
140
18 BK/PK
3
C408
140
20 BK/PK
2
C451
Reversing lamp, left (13411)
1
C451
57
20 BK
5
C408
See page 10–12
S415
140
18 BK/PK
3
C411
140
20 BK/PK
2
C461
Reversing lamp, right (13411)
1
C461
57
20 BK
5
C411
S407
See page 10–12
G303
140
20 BK/PK
8
C465
140
20 BK/PK
3
C487
Reversing lamp, left (13411)
151–41
1
C487
57
20 BK
See page 10–9
G203
S405
140
20 BK/PK
3
C488
Reversing lamp, right (13411)
151–41
1
C488
57
20 BK
S403
S329
140
18 BK/PK
4
C919
3
C911
VPWR
Electrochromatic inside mirror unit (17700)
125–1