C228b (GY)

14401

Electronic Automatic Temperature Control (EATC) module (19980)

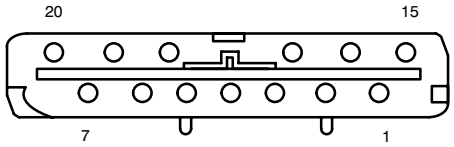

F13003

Pin	Circuit	Circuit function
1	915 (PK/LB)	SCP Bus –
2	729 (RD/WH)	Voltage supplied at all times (overload protected)
3	57 (BK)	Ground
4	470 (PK/BK)	Signal return
5	–	not used
6	243 (LG/OG)	Temperature blend door actuator (19E616), feed
7	767 (LB/OG)	Ambient air temperature sensor (19E702), signal
15	914 (TN/OG)	SCP Bus +
16	296 (WH/VT)	Voltage in Run (overload protected)
17	461 (OG)	Blower motor relay, control
18	246 (VT)	Temperature blend door actuator (19E616), signal
19	434 (LB/BK)	Main light switch (11654), Illumination
20	468 (BN)	Sunload sensor (19E663), signal

C233 (BK)

14401

In–vehicle temperature sensor (19C734)



F02493

Pin	Circuit	Circuit function
1	470 (PK/BK)	Signal return
2	790 (WH/OG)	In–vehicle temperature sensor (19C734), signal

C237 (GY)

14A348



F06089

(1) 206 (WH)
(2) 43 (DB)
(3) 14 (BN)

14401



F06369

(4) 511 (LG)
(5) –
(6) 50 (RD)