C830 (GY)

14K733

A176
Electronic Stability
Program (ESP)
module

F47002

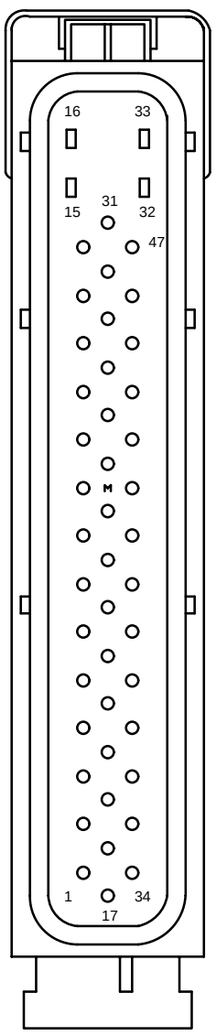

Pin	Circuit	Circuit Function
1	7-CF32 (YE)	Voltage D.C. supplied at all times (sensor)
2	8-CF32 (WH)	Sensor signal
3	–	not used
4	8-CF34 (WH/BU)	Sensor signal
5	7-CF34 (YE/BU)	Voltage D.C. supplied at all times (sensor)
6	49S-CF68 (BU/RD)	Pulsed power feed (overload protected), switched
7	49S-CF6 (BU)	Pulsed power feed (overload protected), switched
8	15S-CF68 (GN/BU)	Voltage, ignition switch in Start or Run (not overload protected), switched
9	91S-CF54 (BK/WH)	Ground, switched
10	7-CF64 (YE/BK)	Voltage D.C. supplied at all times (sensor)
11	9-CF67 (BN/RD)	Sensor signal return (reference/ground)
12	7-CF65 (YE/VT)	Voltage D.C. supplied at all times (sensor)
13	9-CF66 (BN/BU)	Sensor signal return (reference/ground)
14	–	not used
15	91-CF6 (BK/YE)	Ground
16	30-CF6A (RD)	Voltage supplied at all times (not overload protected)
17	8-EE6A (WH)	Sensor signal
18	4-EG6 (GY)	Data link, bus positive
19	5-EG6 (BU)	Data link, bus negative
20	31S-CF71 (BK/BU)	Ground, switched
21	15S-CF58 (GN/OG)	Voltage, ignition switch in Start or Run (not overload protected), switched
22	15-CF6A (GN/YE)	Voltage, ignition switch in Start or Run (not overload protected)