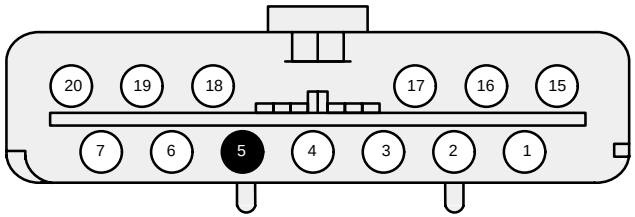


**C280**
**ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 1 | 915 (PK/LB) | SPC (–) |
| 2 | 729 (RD/WH) | Power (Hot at All Times) |
| 3 | 57 (BK) | Ground |
| 4 | 470 (PK/BK) | Sensor Input GND |
| 5 | – | NOT USED |
| 6 | 243 (LG/OG) | Blend Door Actuator Feedback (+5) |
| 7 | 767 (LB/OG) | Ambient Temperature Sensor Input |
| 15 | 914 (TN/OG) | SPC (+) |
| 16 | 296 (WH/VT) | Power (Hot in Run) |
| 17 | 461 (OG) | Blower Relay |
| 18 | 246 (VT) | Blend Door Actuator Feedback (Wiper) |
| 19 | 434 (LB/PK) | Front Panel Illumination |
| 20 | 468 (BN) | Sunload Sensor Input |

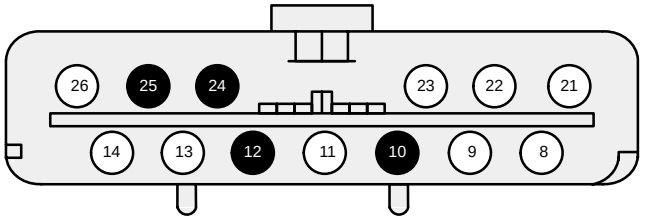


**C281**
**ELECTRONIC AUTOMATIC TEMPERATURE CONTROL (EATC) MODULE**

| PIN | CIRCUIT | CIRCUIT FUNCTION |
|---|---|---|
| 8 | 1070 (BN/LB) | Steering Wheel Switch Input |
| 9 | 247 (WH/YE) | Blend Door Actuator Feedback (GND) |
| 10 | – | NOT USED |
| 11 | 348 (VT) | A/C Pressure Cutoff Signal |
| 12 | – | NOT USED |
| 13 | 250 (OG) | Blend Door Actuator Motor Drive (Heat) |
| 14 | 19 (LB/RD) | Instrument Panel Lamp Feed |
| 21 | 790 (WH/OG) | In-Car Temperature Sensor Input |
| 22 | 575 (YE/BK) | Relay to Auxiliary Control |
| 23 | 184 (TN/OG) | Blower Control Output (PWM) |
| 24 | – | NOT USED |
| 25 | – | NOT USED |
| 26 | 249 (DB/LG) | Blend Door Actuator Motor Driver (Cool) |