C294b (BK)

14401

Function selector switch assembly, front

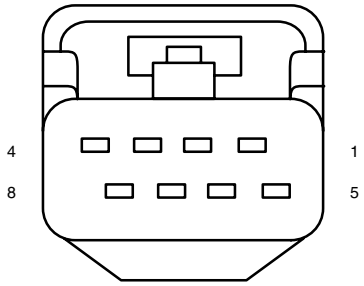

F08159

Pin	Circuit	Circuit function
1	753 (YE/RD)	Blower motor relay, control
2	296 (WH/VT)	Voltage supplied in Start and Run (overload protected)
3	3220 (PK)	max A/C request signal
4	3221 (BN/LB)	A/C allowed request signal
5	348 (VT)	A/C demand signal
6	–	not used
7	–	not used
8	–	not used

C294c (BK)

14401

Function selector switch assembly, front

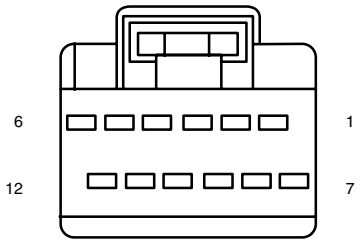

F12077

Pin	Circuit	Circuit function
1	729 (RD/WH)	Voltage supplied at all times (overload protected)
2	296 (WH/VT)	Voltage supplied in Start and Run (overload protected)
3	437 (YE/LG)	Temperature blend door actuator (19E616), control, signal
4	14 (BN)	Power, Exterior lamps
5	59 (DG/VT)	Fused rear window defrost relay, output
6	57 (BK)	Ground
7	3220 (PK)	max A/C request signal
8	3221 (BN/LB)	A/C allowed request signal
9	348 (VT)	A/C demand signal
10	19 (LB/RD)	Illumination, Power
11	875 (BK/LB)	Ground
12	1010 (DB/OG)	Rear window defrost switch (18578), input