C240a (GY)

14401

Radio (18806)

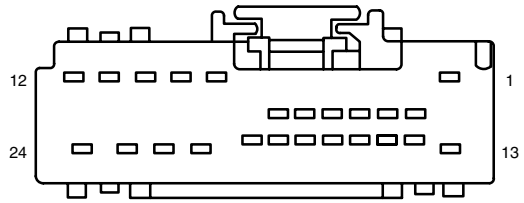

F24021

Pin	Circuit	Circuit function
1	797 (LG/VT)	Voltage supplied at all times (overload protected)
2	194 (PK)	Accessory delay relay, output
3	19 (LB/RD)	Illumination, Power
4	57 (BK)	Ground
5	–	not used
6	–	not used
7	–	not used
8	804 (OG/LG)	Speaker, left front (18808) +
9	800 (GY/LB)	Speaker, left rear (18808) +
10	802 (OG/RD)	Speaker, right rear (18808) +
11	805 (WH/LG)	Speaker, right front (18808) +
12	811 (DG/OG)	Speaker, right front (18808) –
13	694 (BK/LG)	Ground
14	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
15	1000 (RD/BK)	Voltage supplied in Start (overload protected)
16	–	not used
17	–	not used
18	595 (LB/RD)	Audio/climate control switch, Radio (18806), signal
19	–	not used
20	689 (DB)	Parking aid, mute, signal
21	813 (LB/WH)	Speaker, left front (18808) –
22	801 (TN/YE)	Speaker, left rear (18808) –
23	803 (BN/PK)	Speaker, right rear (18808) –
24	–	not used

C240b (GY)

14401

Radio (18806)



F16151

Pin	Circuit	Circuit function
1	1803 (WH)	DVD player, signal, Left, +
2	1804 (LG)	DVD player, signal, Left, –
3	48 (BK)	Shield
4	–	not used
5	–	not used
6	1068 (LG/BK)	Audio System ON (ASYSON)
7	832 (LB/PK)	Audio corporate protocol A
8	833 (TN)	Audio corporate protocol B
9	1805 (RD)	DVD player, signal, Right, +
10	1806 (BK)	DVD player, signal, Right, –
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used