C228b (GY)

14401

Electronic Automatic Temperature Control (EATC) module (19980)

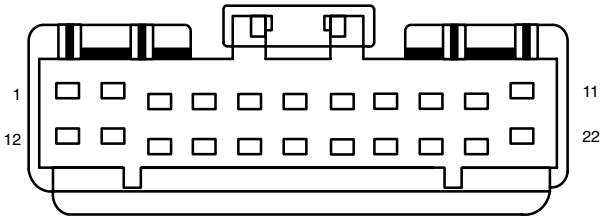

F22006

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	1906 (VT)	UBP Bus
4	–	not used
5	470 (PK/BK)	Sensor signal return (reference/ground)
6	438 (RD/WH)	Air temperature door variable resistor –
7	1010 (DB/OG)	Rear window defrost switch (18578), input
8	1136 (RD/WH)	Temperature blend door actuator, passenger (19E616), Blend door actuator –
9	1137 (YE/LG)	Temperature blend door actuator, passenger (19E616), Blend door actuator +
10	–	not used
11	729 (RD/WH)	Voltage supplied at all times (overload protected)
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	59 (DG/VT)	Fused rear window defrost relay, output
17	–	not used
18	462 (VT)	Auxiliary blower motor relay, control
19	250 (OG)	Temperature blend door actuator, driver (19E616), Blend door actuator –
20	249 (DB/LG)	Temperature blend door actuator, driver (19E616), Blend door actuator +
21	–	not used
22	296 (WH/VT)	Voltage supplied in Start and Run (overload protected)

C233 (GY)

14401

In–vehicle temperature sensor (19C734)



F03239

Pin	Circuit	Circuit function
1	790 (WH/OG)	Vehicle interior, Temperature, signal
2	–	not used
3	470 (PK/BK)	Sensor signal return (reference/ground)

C237

(BK)

14401

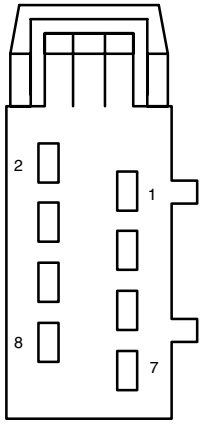

F08112

(GY)

18B518

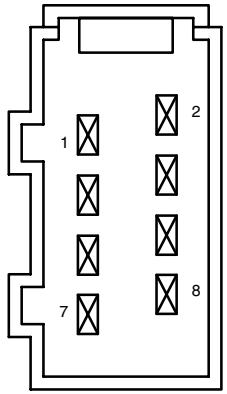

F08114

(1) 437 (YE/LG)
(2) 295 (LB/PK)
(3) 399 (BN/YE)
(4) 261 (OG/BK)
(5) 752 (YE/RD)
(6) 754 (LG/WH)
(7) –
(8) 57 (BK)