87-3 AUTOLAMPS/DELAYED EXIT

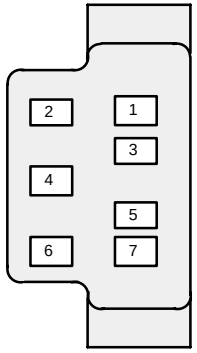

C269 (GRAY)

MULTIFUNCTION SWITCH

PIN	CIRCUIT	CIRCUIT FUNCTION
1	502 (GY)	Headlamp Dimmer Relay
2	589 (OG)	Speed Select
3	13 (RD/BK)	LOW Beam Output
4	993 (BN/WH)	Common
5	12 (LG/BK)	HIGH Beam Indicator
6	590 (DB/WH)	Interval Delay Set
7	221 (OG/WH)	Power Feed

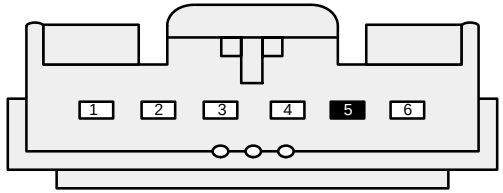

C286 (BLACK)

DAY/NIGHT SENSOR/AMPLIFIER

PIN	CIRCUIT	CIRCUIT FUNCTION
1	676 (PK/OG)	Ground
2	1269 (OG/RD)	PATS Module to Autolamp/LED
3	195 (TN/WH)	Tail Lamp Switch Feed
4	218 (WH/VT)	Autolamp Amplifier
5	–	NOT USED
6	705 (LG/OG)	Battery Saver Lamp Feed

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C180	97-3
C250	60-8
C256	63-5
C262	13-18
C2026	58-4
C2027	58-4
C2029	58-5