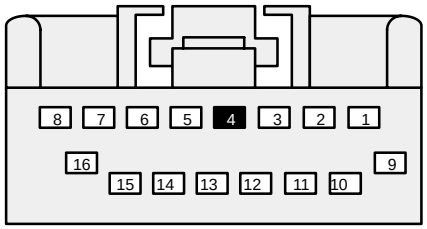

C211

RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	1418 (LB/WH)	Illumination Power
2	1205 (BK)	Ground
3	1000 (RD/BK)	Power (Hot in Start)
4	–	NOT USED
5	802 (OG/RD)	RR Speaker Signal (+)
6	803 (BN/PK)	RR Speaker Signal (–)
7	805 (WH/LG)	RF Speaker Signal (+)
8	811 (DG/OG)	RF Speaker Signal (–)
9	797 (LG/VT)	Power (Hot at All Times)
10	194 (PK)	Power (Accessory Delay Relay Output)
11	694 (BK/LG)	Ground
12	800 (GY/LB)	LR Speaker Signal (+)
13	801 (TN/YE)	LR Speaker Signal (–)
14	804 (OG/LG)	LF Speaker Signal (+)
15	813 (LB/WH)	LF Speaker Signal (–)
16	694 (BK/LG)	Ground



C213

RADIO

PIN	CIRCUIT	CIRCUIT FUNCTION
1	–	NOT USED
2	–	NOT USED
3	–	NOT USED
4	–	NOT USED
5	1068 (LG/BK)	Audio System ON
6	832 (LB/PK)	ACP A
7	833 (TN)	ACP B
8	–	NOT USED
9	–	NOT USED
10	–	NOT USED
11	–	NOT USED
12	–	NOT USED
13	–	NOT USED
14	–	NOT USED
15	–	NOT USED
16	48	Audio Shield
17	1561 (OG)	Audio- Right Channel (+)
18	1562 (YE)	Audio- Right Channel (–)
19	1559 (RD)	Audio- Left Channel (+)
20	1560 (WH)	Audio- Left Channel (–)