58-5 LIGHTING CONTROL MODULE (LCM)

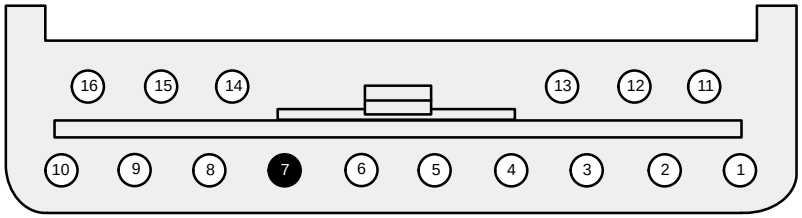

C2029 (BLACK)
LIGHTING CONTROL MODULE (LCM)

PIN	CIRCUIT	CIRCUIT FUNCTION
1	705 (LG/OG)	Demand Lighting Output
2	19 (LB/RD)	Variable Voltage Dimming Output
3	117 (PK/BK)	All Doors Lock Input
4	57 (BK)	Ground
5	53 (BK/LB)	Courtesy Lamps Output
6	195 (TN/WH)	B+ to Module
7	–	NOT USED
8	450 (DG/LG)	Safety Belt Indicator Output
9	57 (BK)	Ground
10	502 (GY)	Low Beams Output
11	54 (LG/YE)	B+ to Module
12	484 (OG/BK)	Pulse Width Modulator Dimming Output
13	44 (LB)	Flasher Output
14	14 (BN)	Park lamp Output
15	385 (WH/RD)	Flasher Power Input
16	221 (OG/WH)	B+ to Module

CONNECTOR REFERENCE LIST

CONNECTOR	SECTION-PAGE
C251	60-8
C254	63-5
C255	63-5
C256	63-5
C268	90-6
C277	46-3
C286	87-3
C2004	65-3