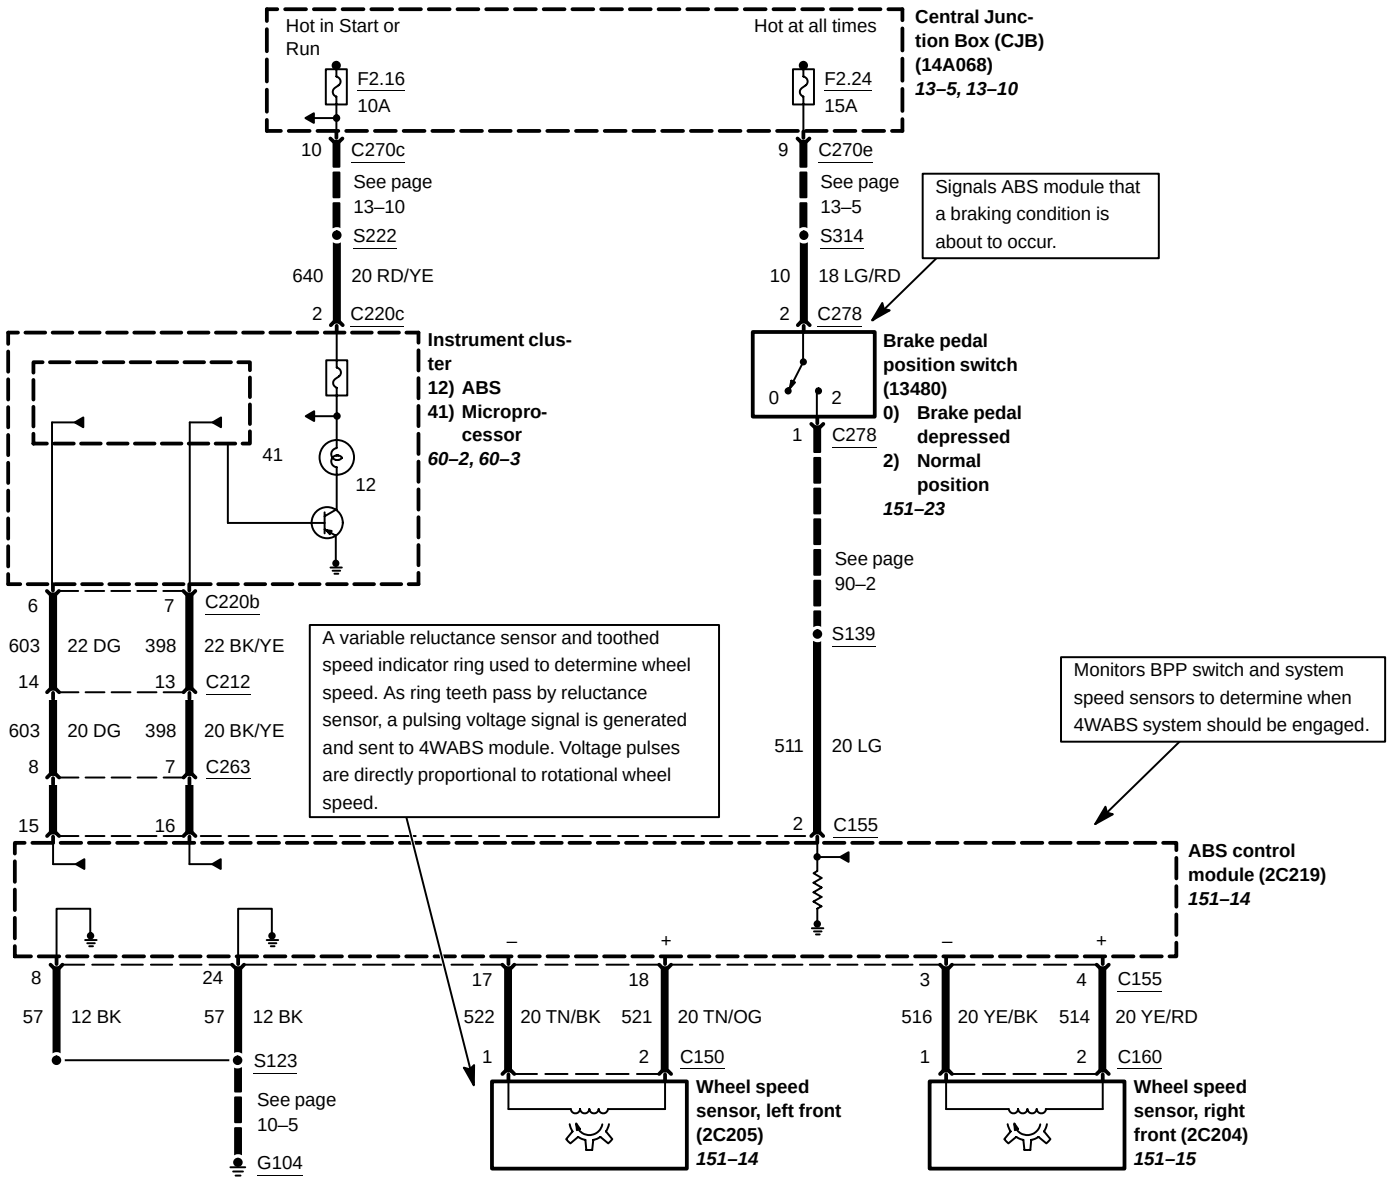
Hot in Start or Run
Hot at all times
Central Junction Box (CJB) (14A068) 13–5, 13–10
F2.16 10A
F2.24 15A
10 C270c
9 C270e
See page 13–10
See page 13–5
S222
S314
640 20 RD/YE
10 18 LG/RD
2 C220c
2 C278
Signals ABS module that a braking condition is about to occur.
Instrument cluster
12) ABS
41) Microprocessor
60–2, 60–3
Brake pedal position switch (13480)
0) Brake pedal depressed
2) Normal position
151–23
0
2
1 C278
41
12
See page 90–2
6 7 C220b
603 22 DG 398 22 BK/YE
14 13 C212
603 20 DG 398 20 BK/YE
8 7 C263
15 16
S139
511 20 LG
2 C155
A variable reluctance sensor and toothed speed indicator ring used to determine wheel speed. As ring teeth pass by reluctance sensor, a pulsing voltage signal is generated and sent to 4WABS module. Voltage pulses are directly proportional to rotational wheel speed.
Monitors BPP switch and system speed sensors to determine when 4WABS system should be engaged.
ABS control module (2C219) 151–14
8 24 17 18 3 4 C155
57 12 BK 57 12 BK 522 20 TN/BK 521 20 TN/OG 516 20 YE/BK 514 20 YE/RD
S123
1 2 C150 1 2 C160
See page 10–5
G104
Wheel speed sensor, left front (2C205) 151–14
Wheel speed sensor, right front (2C204) 151–15