C135

12A581

A7
ABS control module
(2C219)

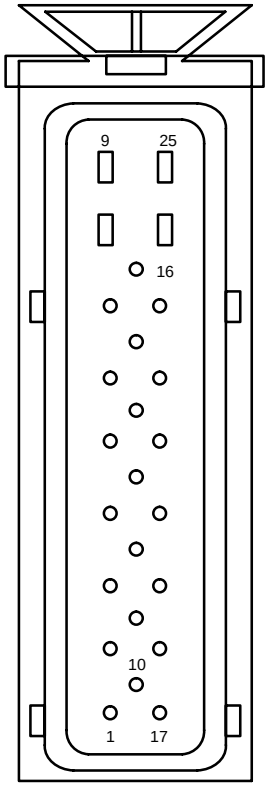

F25010

Pin	Circuit	Circuit function
1	959 (GY)	Traction assist switch, feed, to ABS control module
2	810 (RD/LG)	Brake pedal position switch (13480), input
3	914 (TN/OG)	SCP Bus +
4	522 (TN/BK)	Wheel speed sensor, left front (2C205) –
5	516 (YE/BK)	Wheel speed sensor, right front (2C204) –
6	519 (LG/BK)	Rear axle speed sensor (4B409) –
7	939 (VT)	traction assist, indicator, Lamp
8	530 (LG/YE)	Chassis Ground
9	534 (YE/LG)	Voltage supplied at all times (overload protected)
10	512 (TN/LG)	Brake indicator, control
11	915 (PK/BK)	SCP Bus –
12	521 (TN/OG)	Wheel speed sensor, left front (2C205) +
13	514 (YE/RD)	Wheel speed sensor, right front (2C204) +
14	518 (LG/RD)	Rear axle speed sensor (4B409) +
15	603 (DG)	Anti–lock brake indicator, control
16	533 (TN/RD)	Voltage in Run (overload protected)
17	–	not used
18	–	not used
19	–	not used
20	–	not used
21	–	not used
22	–	not used
23	–	not used
24	530 (LG/YE)	Chassis Ground
25	534 (YE/LG)	Voltage supplied at all times (overload protected)