C294a

14401

P82
Function selector switch assembly, front



F04027

Pin	Circuit	Circuit function
1	1003 (GY/YE)	Voltage in Run (overload protected)
2	348 (VT)	A/C demand signal
3	364 (BK/LG)	Voltage in Run (overload protected)
4	260 (RD/OG)	Blower motor relay, control

C294b

14401

P82
Function selector switch assembly, front



F02243

Pin	Circuit	Circuit function
1	19 (LB/RD)	Power, Hot with Headlamps on
2	57 (BK)	Ground

C294c

14401

P82
Function selector switch assembly, front



F04187

Pin	Circuit	Circuit function
1	261 (OG/BK)	Blower motor, to switch - High
2	754 (LG/WH)	Blower switch speed control, to resistor
3	57 (BK)	Ground
4	752 (YE/RD)	Blower switch speed control, to resistor

C300

14401

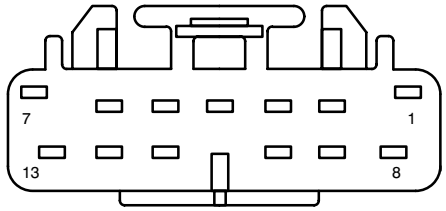

F13009

19A170

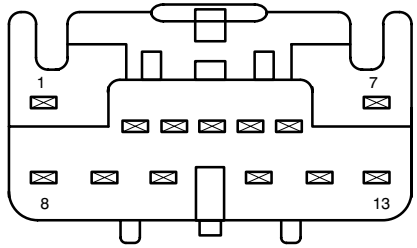

F13010

(1) 828 (VT/LB)
(2) 829 (WH/VT)
(3) 820 (DB/YE)
(4) 819 (LG/WH)
(5) 816 (LG/VT)
(6) 815 (LG/OG)
(7) 57 (BK)
(8) 172 (LB/RD)
(9) 169 (LG/BK)
(10) 811 (DG/OG)
(11) 805 (WH/LG)
(12) 813 (LB/WH)
(13) 804 (OG/LG)