C281b

14401

A255
Four–wheel drive
control module

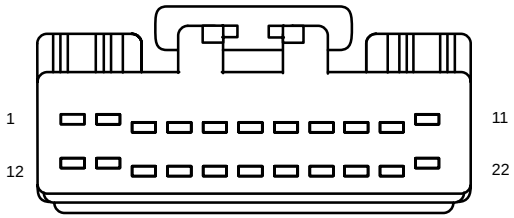

F22017

Pin	Circuit	Circuit function
1	463 (RD/WH)	Neutral, switch sense, input
2	–	not used
3	780 (DB)	Four–wheel drive control module, to, Four–wheel drive switch
4	465 (WH/LB)	ESOF, Reference voltage
5	976 (OG)	Power to encoder
6	605 (RD)	Shift solenoid 4x2
7	145 (GY/BK)	Shift solenoid 4x4
8	975 (BN/YE)	Four–wheel drive Low indicator, control
9	210 (LB)	Four–wheel drive High indicator, control
10	782 (BN/WH)	Transfer case low to high relay, control
11	781 (OG/LB)	Transfer case high to low relay, control
12	810 (RD/LG)	Brake pedal position switch (13480), input
13	–	not used
14	–	not used
15	771 (VT/YE)	Motor position 5
16	763 (OG/WH)	Motor position 2
17	764 (BN/WH)	Motor position 3
18	770 (WH)	Motor position 4
19	–	not used
20	–	not used
21	–	not used
22	–	not used

C281c

14401

A255
Four–wheel drive
control module

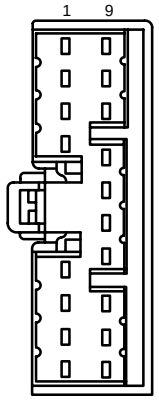

F18021

Pin	Circuit	Circuit function
1	–	not used
2	–	not used
3	–	not used
4	33 (WH/PK)	Voltage supplied in Start (overload protected)
5	22 (LB/BK)	Voltage supplied at all times (overload protected)
6	–	not used
7	–	not used
8	–	not used
9	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
10	–	not used
11	22 (LB/BK)	Voltage supplied at all times (overload protected)
12	–	not used
13	–	not used
14	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
15	–	not used
16	–	not used
17	–	not used
18	–	not used