C1019 (GY)

14401

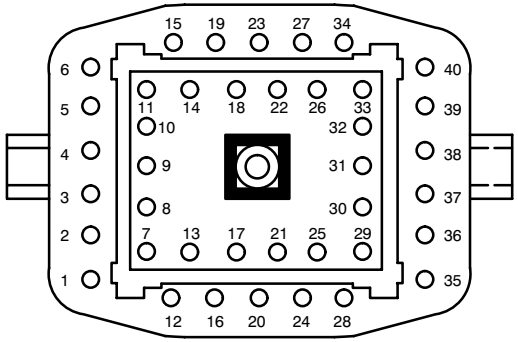

F40003

12A581

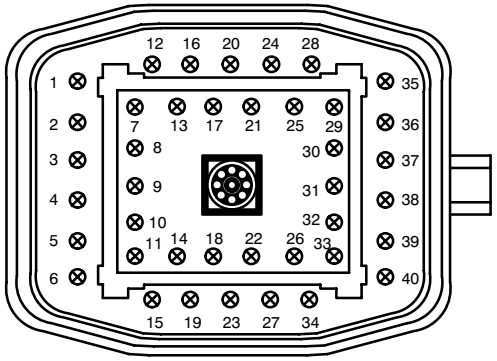

F40002

(1)		(11)	94 (RD/BK)	(21)	420 (DB/YE)	(31)	429 (VT/LG)
(2)		(12)		(22)	470 (PK/BK)	(32)	428 (OG/BK)
(3)		(13)		(23)		(33)	
(4)	1543 (YE)	(14)	729 (RD/WH)	(24)	460 (YE/LB)	(34)	275 (YE)
(5)	1462 (RD/YE)	(15)	939 (VT)	(25)	161 (DG/OG)	(35)	
(6)	43 (RD)	(16)		(26)	432 (PK/BK)	(36)	787 (PK/BK)
(7)	421 (PK)	(17)	1115 (TN/WH)	(27)	603 (DG)	(37)	
(8)	6 (YE/LG)	(18)	767 (LB/OG)	(28)		(38)	
(9)	29 (YE/WH)	(19)	533 (TN/RD)	(29)	70 (LB/WH)	(39)	
(10)	140 (BK/PK)	(20)	131 (VT/OG)	(30)	396 (BK/OG)	(40)	

C1021

13A006

E1
Headlamp, left
(13008)



F03169

Pin	Circuit	Circuit function
1	12 (LG/BK)	Power, Hot with High Beams on
2	57 (BK)	Ground
3	161 (DG/OG)	Headlamp, right (13008), (Low beam lamp feed)

C1023

12A581

E164
Park/turn lamp, left
front (13411)



F03099

Pin	Circuit	Circuit function
1	57 (BK)	Ground
2	14 (BN)	Power, Exterior lamps
3	3 (LG/WH)	Turn lamps, feed, left front

C1025

12A581

N249
Brake pressure
switch (2B264)



F02089

Pin	Circuit	Circuit function
1	307 (BK/YE)	Brake pressure switch (2B264), input
2	10 (LG/RD)	Voltage supplied at all times (overload protected)