C2145b

14401

A200
Lighting control
module



F16113

Pin	Circuit	Circuit function
1	705 (LG/OG)	Battery saver relay, switched power
2	19 (LB/RD)	Instrument illumination, feed
3	117 (PK/BK)	Door lock, output
4	57 (BK)	Ground
5	53 (BK/LB)	Interior lamp relay, switched power, output
6	195 (TN/WH)	Voltage supplied at all times (overload protected)
7	–	not used
8	450 (DG/LG)	Safety belt indicator, feed
9	57 (BK)	Ground
10	502 (GY)	Turn signal
11	54 (LG/YE)	Voltage supplied at all times (overload protected)
12	484 (OG/BK)	Interior lamps
13	44 (LB)	Lighting control module, to turn signal switch
14	14 (BN)	Power, Exterior lamps
15	385 (WH/RD)	Lighting control module, to turn signal switch
16	221 (OG/WH)	Voltage supplied at all times (overload protected)

C2145c

14401

A200
Lighting control
module

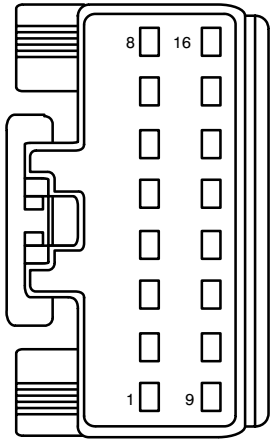

F16073

Pin	Circuit	Circuit function
1	296 (WH/VT)	Voltage in Run or Accessory (overload protected)
2	1034 (BK/WH)	Front dome lamp, Switches, to module
3	158 (BK/PK)	Key warning switch (11A127), input
4	–	not used
5	486 (BN/WH)	Liftgate unlock relay, control
6	–	not used
7	57 (BK)	Ground
8	70 (LB/WH)	ISO Bus
9	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
10	1033 (RD/YE)	Headlamp switch, on input
11	627 (BK/OG)	Door ajar indicator, control
12	465 (WH/LB)	Switch illumination, input
13	1032 (WH/BK)	Parking Lamps, Headlamp switch, on input
14	340 (RD/LB)	output
15	28 (BK/PK)	wiper park position signal
16	–	not used