C281a (BK)

14401

Four–wheel drive control module

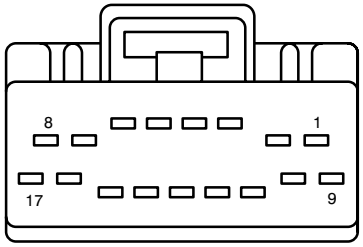

F17005

Pin	Circuit	Circuit function
1	931 (OG)	Voltage supplied at all times (overload protected)
2	704 (DG/LG)	Voltage supplied at all times (overload protected)
3	–	not used
4	70 (LB/WH)	ISO Bus
5	465 (WH/LB)	Four–wheel drive control module, to Four–wheel drive switch
6	–	not used
7	57 (BK)	Ground
8	778 (OG)	Four–wheel drive control module, to Transfer case assembly
9	1003 (GY/YE)	Voltage in Run (overload protected)
10	–	not used
11	771 (VT/YE)	Motor position 5
12	810 (RD/LG)	Brake pedal position switch (13480), input
13	–	not used
14	999 (LB/WH)	Door ajar indicator, monitor
15	770 (WH)	Motor position 4
16	463 (RD/WH)	Neutral, switch sense, input
17	777 (YE)	Four–wheel drive control module, to Transfer case assembly

C281b (GY)

14401

Four–wheel drive control module

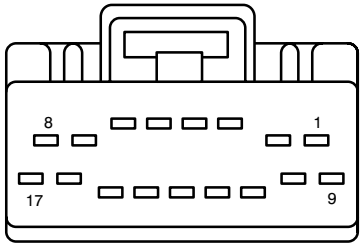

F17005

Pin	Circuit	Circuit function
1	435 (YE/LB)	signal, return
2	570 (BK/WH)	Ground
3	323 (LB/YE)	Neutral tow indicator, output
4	762 (YE/WH)	Motor position 1
5	–	not used
6	783 (GY)	Four–wheel drive, indicator, High
7	764 (BN/WH)	Motor position 3
8	–	not used
9	784 (LB/BK)	Four–wheel drive, indicator, Low
10	–	not used
11	–	not used
12	679 (GY/BK)	Vehicle Speed Sensor (VSS) +
13	763 (OG/WH)	Motor position 2
14	–	not used
15	–	not used
16	640 (RD/YE)	Voltage supplied in Start and Run (overload protected)
17	–	not used