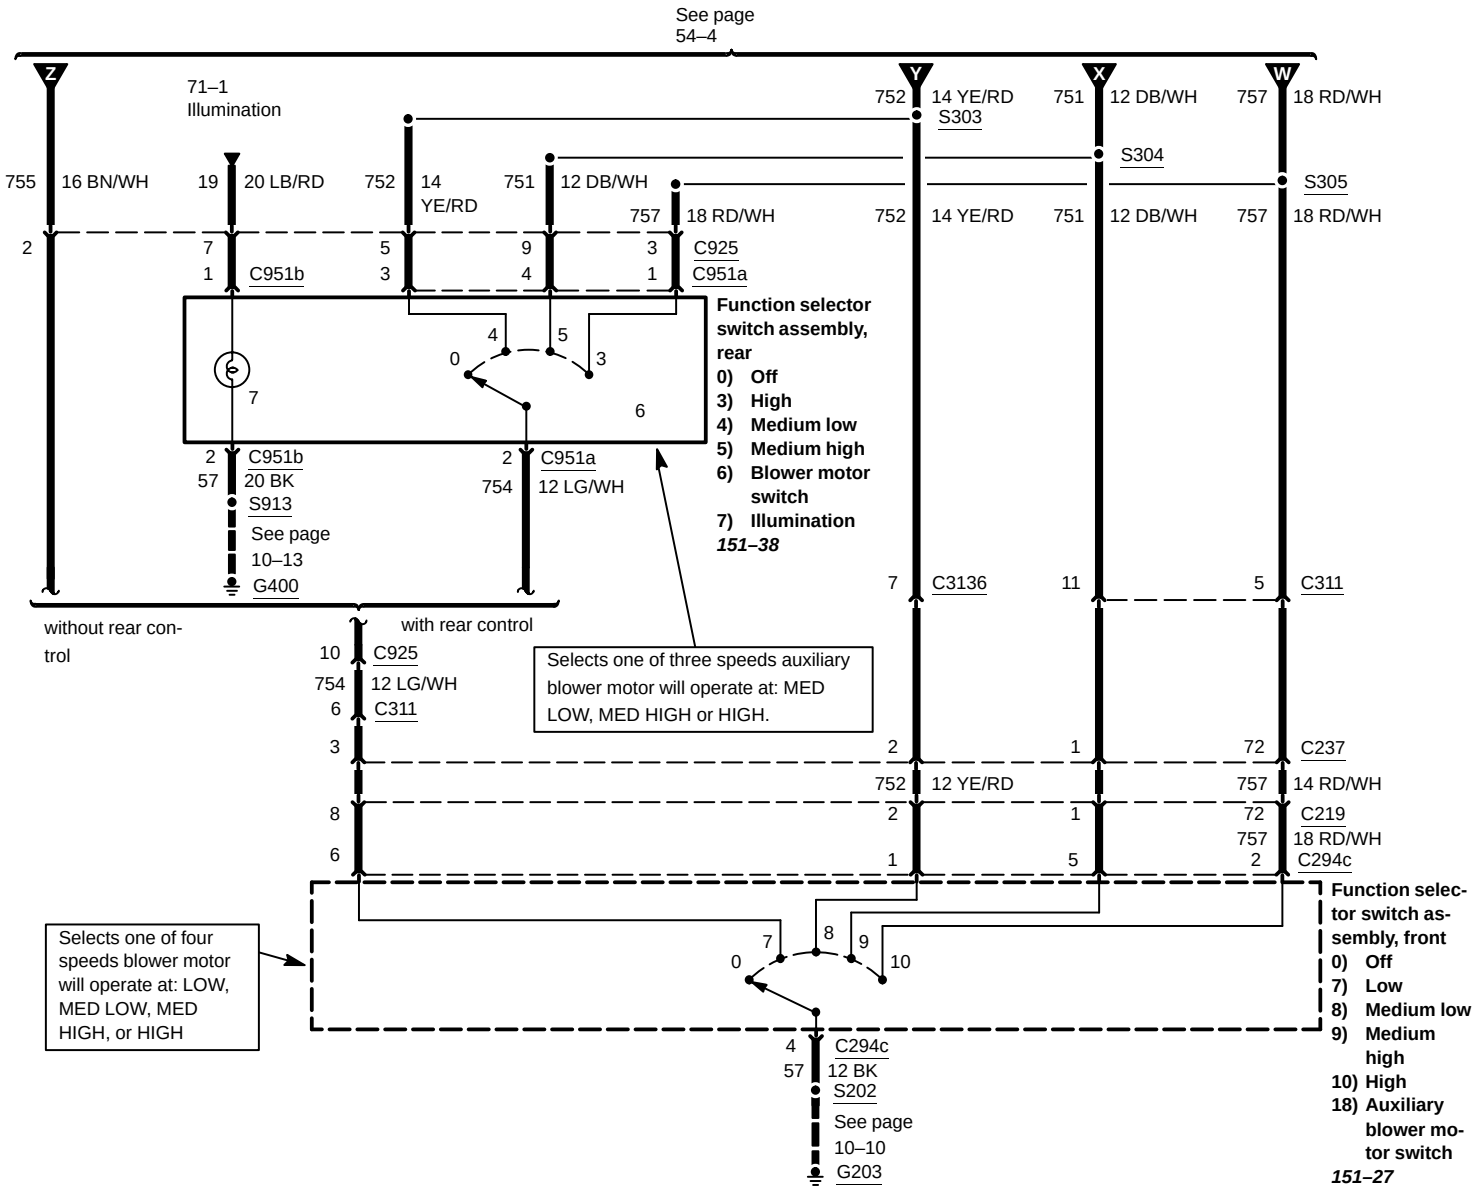
See page 54–4
Z
Y
X
W
71–1 Illumination
755 16 BN/WH
19 20 LB/RD
752 14 YE/RD
751 12 DB/WH
757 18 RD/WH
752 14 YE/RD S303
751 12 DB/WH S304
757 18 RD/WH S305
C925
C951b
C951a
Function selector switch assembly, rear
0) Off
3) High
4) Medium low
5) Medium high
6) Blower motor switch
7) Illumination
151–38
C951b 20 BK
S913
See page 10–13
G400
C951a 12 LG/WH
without rear control
with rear control
C925 12 LG/WH
C311
C3136
C237
C219
C294c
Selects one of three speeds auxiliary blower motor will operate at: MED LOW, MED HIGH or HIGH.
Selects one of four speeds blower motor will operate at: LOW, MED LOW, MED HIGH, or HIGH
Function selector switch assembly, front
0) Off
7) Low
8) Medium low
9) Medium high
10) High
18) Auxiliary blower motor switch
151–27
C294c 12 BK
S202
See page 10–10
G203