C167 (BK)

7C078

Digital Transmission Range (DTR) sensor (7F293)

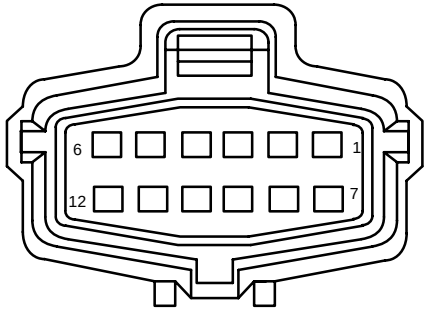

F12040

Pin	Circuit	Circuit function
1	–	not used
2	359 (GY/RD)	signal, return
3	199 (LB/YE)	Digital Transmission Range (DTR) sensor, TR3A
4	1144 (YE/BK)	Digital Transmission Range (DTR) sensor, TR1
5	1145 (LB/BK)	Digital Transmission Range (DTR) sensor, TR2
6	1143 (WH/BK)	Digital Transmission Range (DTR) sensor, TR4
7	–	not used
8	–	not used
9	1087 (OG)	Voltage in Run (overload protected)
10	32 (RD/LB)	Voltage supplied in Start (overload protected)
11	140 (BK/PK)	Voltage supplied in reverse
12	33 (WH/PK)	switched power, to, Starter relay (11450)

* 3.8L

C171 (GN)

***9D930**
12B637

Heated Oxygen Sensor (HO2S) #11 (9F472)



F04265

Pin	Circuit	Circuit function
1	387 (RD/WH)	Heated Oxygen Sensor (HO2S) #11 (9F472), heater
2	391 (RD/YE)	Voltage supplied in Start and Run (overload protected)
3	74 (GY/LB)	Heated Oxygen Sensor (HO2S) #11 (9F472), input
4	359 (GY/RD)	signal, return

C169 (BK)

15525

Reversing lamps switch



F02565

Pin	Circuit	Circuit function
A	1087 (OG)	Voltage in Run (overload protected)
B	140 (BK/PK)	Voltage supplied in reverse