C3183 (GN)

14A488

Low tire pressure module

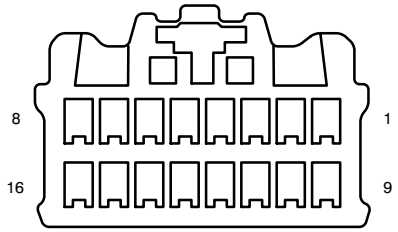

F16175

Pin	Circuit	Circuit function
1	915 (PK/LB)	Standard Corporate Protocol (SCP) data –
2	914 (TN/OG)	Standard Corporate Protocol (SCP) data +
3	1003 (GY/YE)	Voltage supplied at all times (overload protected)
4	6 (YE/LG)	Horn relay, control
5	1002 (BK/PK)	Voltage in Run or Accessory (overload protected)
6	1205 (BK)	Ground
7	–	not used
8	–	not used
9	–	not used
10	–	not used
11	–	not used
12	–	not used
13	–	not used
14	–	not used
15	–	not used
16	–	not used

C3191 (GY)

14C719

Heated seat module, driver side front



F12217

Pin	Circuit	Circuit function
1	1205 (BK)	Ground
2	–	not used
3	1061 (BN/LB)	Seat cushion heater, driver side, Sensor, return
4	1060 (BK/LB)	Seat cushion heater, driver side, Sensor, feed
5	298 (VT/OG)	Voltage supplied in Start and Run (overload protected)
6	1064 (YE/LB)	Seat cushion heater, driver side, feed
7	1067 (VT/LB)	Seat cushion heater, driver side, return
8	581 (RD)	Heated seat switch, driver side, input
9	–	not used
10	461 (OG)	Heated seat switch, driver side, indicator
11	–	not used
12	175 (BK/YE)	Voltage supplied at all times (overload protected)