## C3184b (GY)

### 14A005

Four–wheel drive control module (14B466)

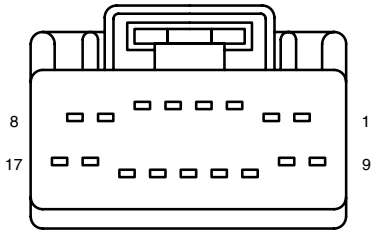


F17006

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 1815 (PK/LB) | CAN 1 – |
| 2 | 875 (BK/LB) | Ground |
| 3 | – | not used |
| 4 | 1906 (VT) | UBP Bus |
| 5 | – | not used |
| 6 | – | not used |
| 7 | – | not used |
| 8 | 1524 (DB) | Voltage supplied at all times (overload protected) |
| 9 | 1814 (WH/LB) | CAN 1 + |
| 10 | 682 (DB) | Four–wheel drive switch, Signal return |
| 11 | – | not used |
| 12 | 605 (RD) | Integrated wheel ends solenoid, control |
| 13 | – | not used |
| 14 | 1498 (PK/OG) | throttle position signal |
| 15 | – | not used |
| 16 | 780 (DB) | Four–wheel drive switch, position sense |
| 17 | 704 (DG/LG) | Voltage supplied at all times (overload protected) |

## C3185 (GY)

### 14A005

Running board motor assembly, left




F04347

| Pin | Circuit | Circuit function |
|---|---|---|
| 1 | 1943 (RD/WH) | Voltage supplied at all times (overload protected) |
| 2 | 1944 (BN/PK) | Running board motor assembly, left, control |
| 3 | 1975 (DG/YE) | running board motor diagnostics |
| 4 | 57 (BK) | Ground |