LEFT REAR SEAT BACK OUTBOARD HINGE REPLACEMENT

AFFECTED VEHICLES: **CERTAIN 2000-01 MODEL YEAR FOCUS 3 DOOR AND WAGON MODELS**

OVERVIEW

This procedure provides the detail to replace the left rear seat back hinge with a new, redesigned hinge.

SERVICE PROCEDURE

REMOVAL

1. Position the driver seat as far forward as possible to gain adequate access to work on the rear seat.
2. Tilt the rear seat cushion forward.
3. Remove the center and left seat belt anchor bolts, then remove the left belt from the guide strap at the top of the seat back. See Figure 1.

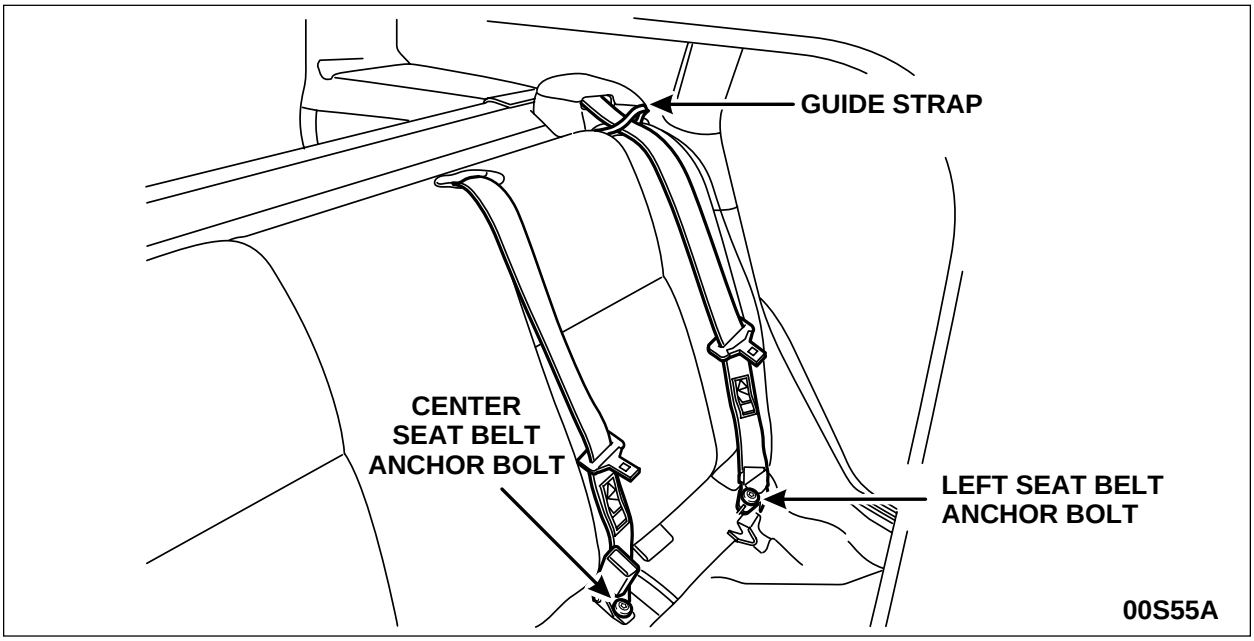


FIGURE 1

4. Unlatch and tilt the left seat back forward.

Ford Motor Company
CPR © 2001 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
01/01

5. Disengage the seat cover J-hook retainer along the bottom of the seat back, then pull the cover up to gain access to the seat back hinges. See Figure 2.

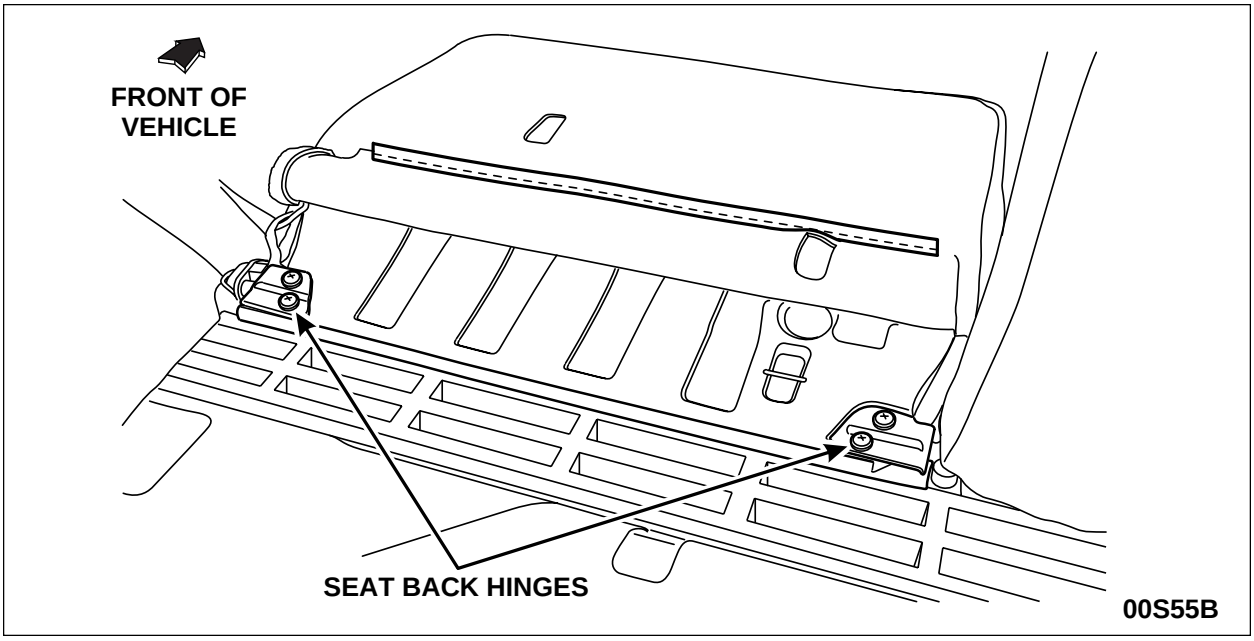


FIGURE 2

6. Remove the pivot bracket-to-seat back retainer bolts and remove the seat back assembly from the vehicle.
7. Remove the left rear seat back outboard hinge from the vehicle. See Figure 3.

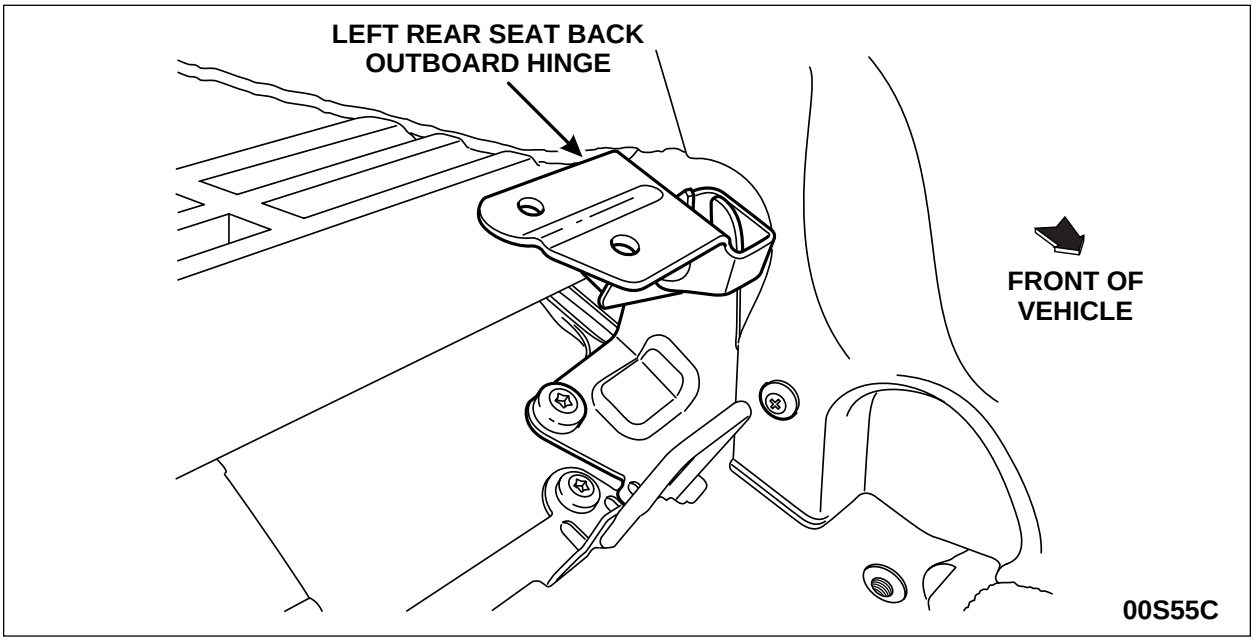


FIGURE 3

Ford Motor Company
CPR © 2001 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
01/01

INSTALLATION

1. Install the new left rear seat back outboard hinge and install the retainer bolts and push pin. Tighten the bolts to 38 Nm (28 lb-ft).
2. Install the seat back assembly. Tighten the bolts to 28 Nm (21 lb-ft).
3. Secure the seat back cover, then position the seat in an upright position.
4. Route the left seat belt through the guide strap, then secure both the center and left seat belt anchors to the floor. Tighten the bolts to 38 Nm (28 lb-ft).
5. Reposition the seat cushion and driver seat back to their original positions.

Ford Motor Company
CPR © 2001 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
01/01