VEHICLE IDENTIFICATION NUMBER (VIN) PLATE REPLACEMENT

AFFECTED VEHICLES: CERTAIN 2000 F-53 MOTORHOME STRIPPED CHASSIS

SERVICE PROCEDURE

1. Locate the metal vehicle identification number (VIN) plate. It will be located either on the dash panel visible through the left lower corner of the windshield or on a vertical frame member under the hood near the brake master cylinder assembly. See Figures 1 and 2.
2. Remove the VIN plate. It will be attached with either screws or rivets.
3. **CAUTION: Do not install rivets into any plastic trim panel or damage may occur.**

   Using the supplied rivets or original fasteners, install the ***new*** VIN plate in the same location and manner as the original.
4. Destroy the original VIN plate by cutting along a line that connects the rivet holes and sending it to:

Ford Motor Company
State and Consumer Regulations Department
Automotive Safety and Engineering Standards Office
Fairlane Plaza South
Suite 500, 330 Town Center Drive
Dearborn, Michigan 48126

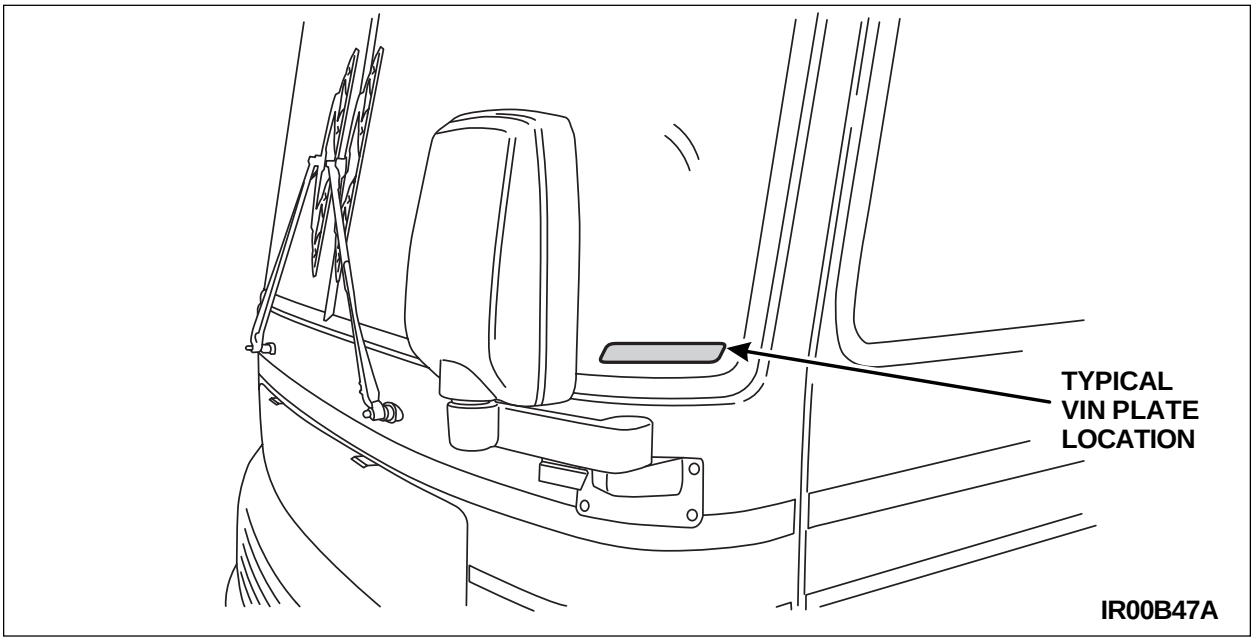

FIGURE 1

CPR © 2000 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/00

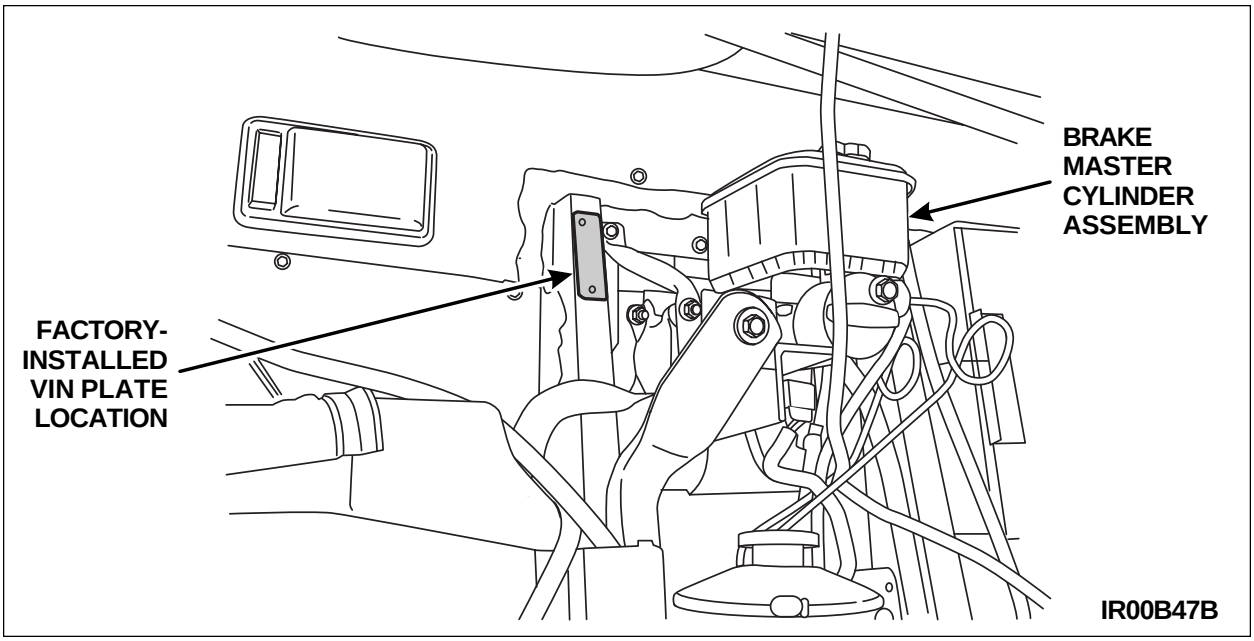

FIGURE 2

CPR © 2000 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/00