JACKING INSTRUCTIONS

AFFECTED VEHICLES: **1998-2000 MODEL YEAR CROWN VICTORIA, GRAND MARQUIS AND TOWN CAR**

OVERVIEW

There are four (4) items revising the jacking instructions that must be placed in the vehicle:

- Tire Change Procedure Supplement.
- Jack Operating Instructions label.
- Jack Usage and Stowage label.
- Jack Usage and Stowage/Tire Changing Instruction placard.

The following instructions/illustrations will help locate the proper area for each of these items.

TIRE CHANGE PROCEDURE SUPPLEMENT PLACEMENT

1. Insert the ***new*** tire change procedure supplement into the vehicle owner's guide, which is located in the glove compartment. See Figure 1.

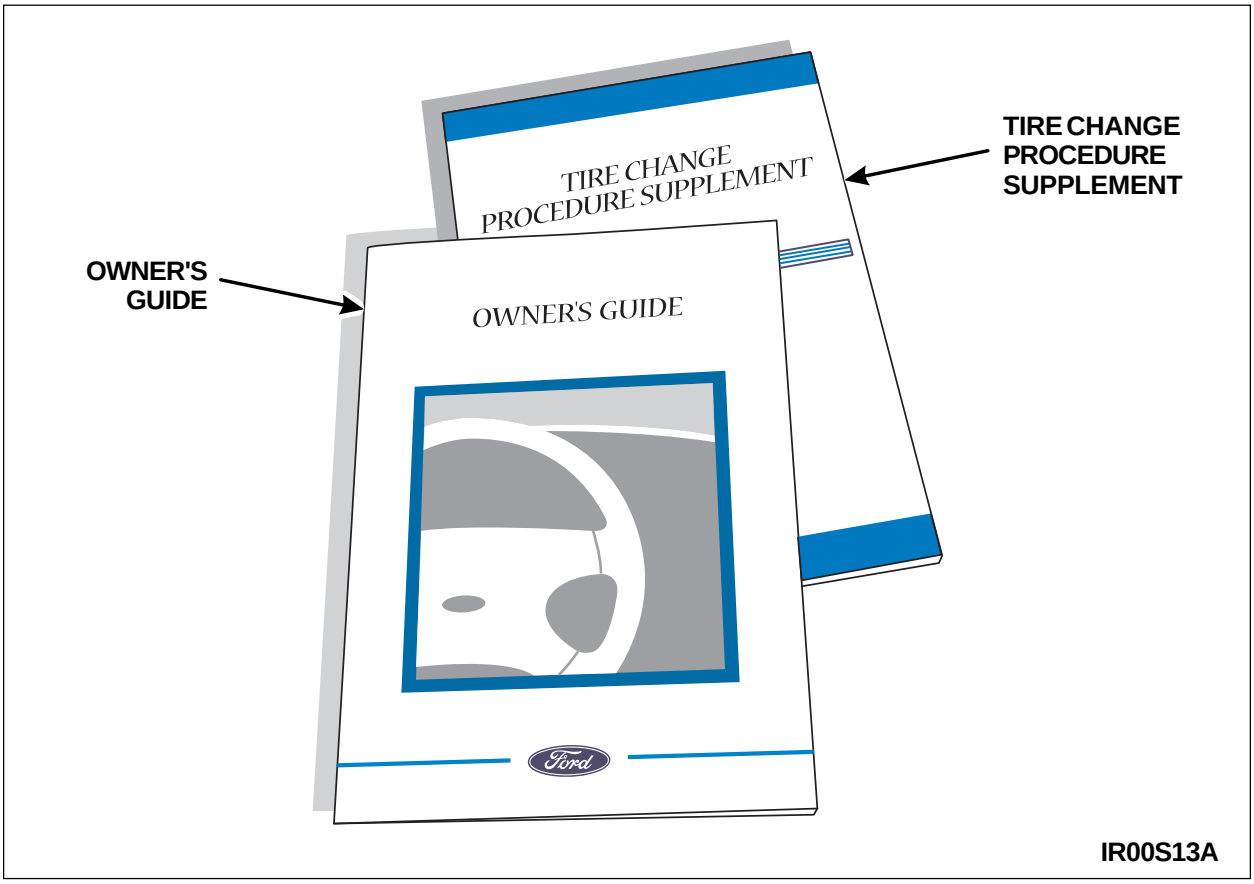


FIGURE 1

CPR © 2000 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
07/00

JACK OPERATING INSTRUCTIONS LABEL PLACEMENT

1. NOTE: The jack may be located under the spare tire or behind the right quarter trim panel.

   Locate the jack by either removing the spare tire cover and spare tire (if equipped), or by removing the right quarter trim panel.

2. Install the Jack Operating Instructions label onto the jack as illustrated. See Figure 2.

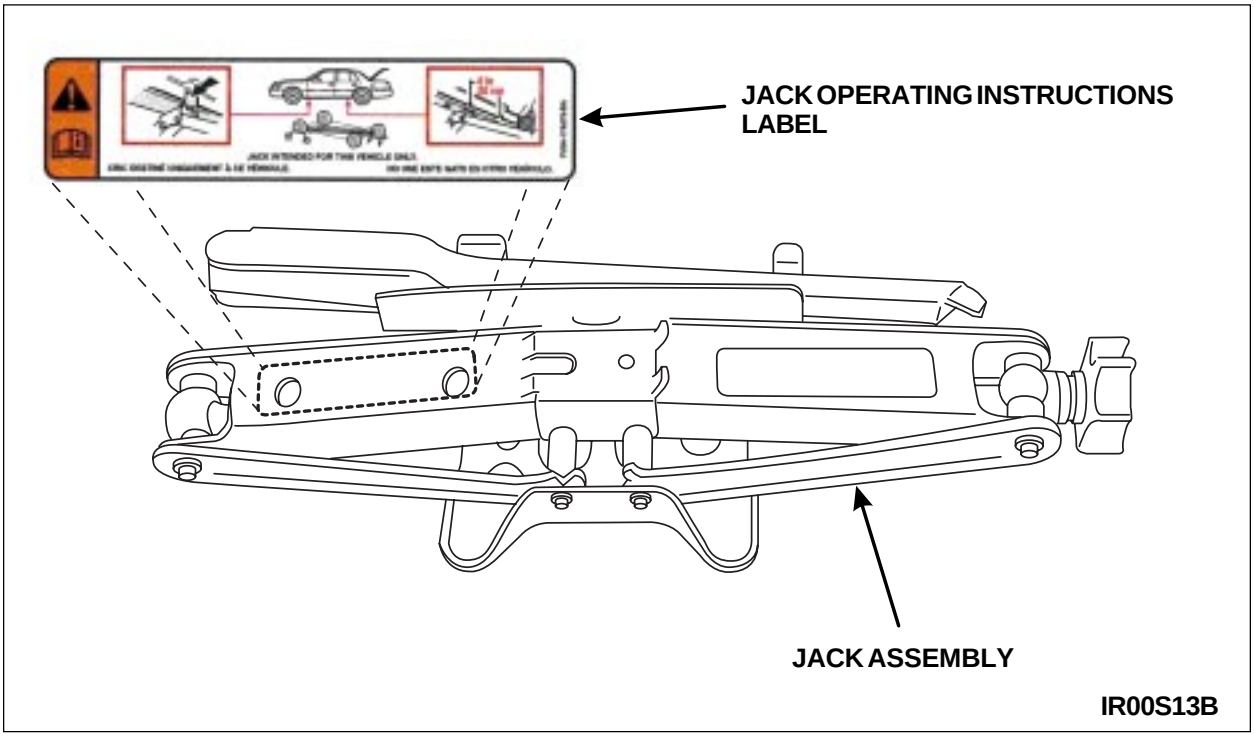


FIGURE 2

CPR © 2000 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
07/00

JACK USAGE AND STOWAGE LABEL PLACEMENT

1. NOTE: The Jack Usage and Stowage label may be located on the inner right quarter panel or the underside of the spare tire cover.

   Locate the original Jack Usage and Stowage label. Then install the ***new*** Jack Usage and Stowage label directly over the original label as illustrated. See Figure 3.

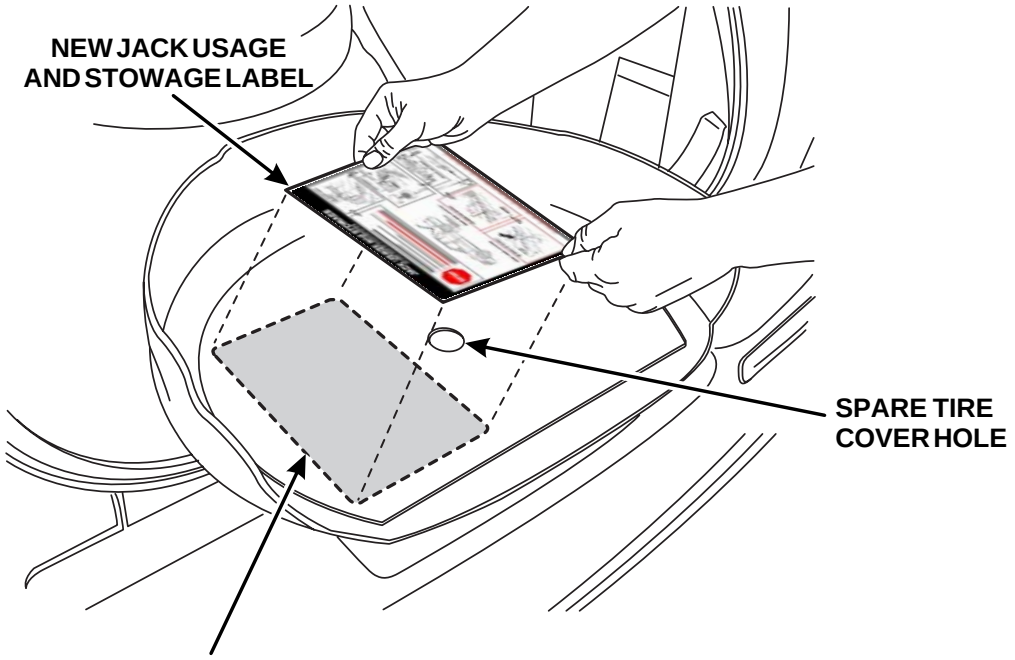


FIGURE 3

CPR © 2000 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
07/00

JACK USAGE AND STOWAGE/TIRE CHANGING INSTRUCTIONS PLACARD PLACEMENT

1. Install the spare tire, if removed. Then place the ***new*** Jack Usage And Stowage/Tire Changing Instruction placard on top of the spare tire as illustrated. See Figure 4.

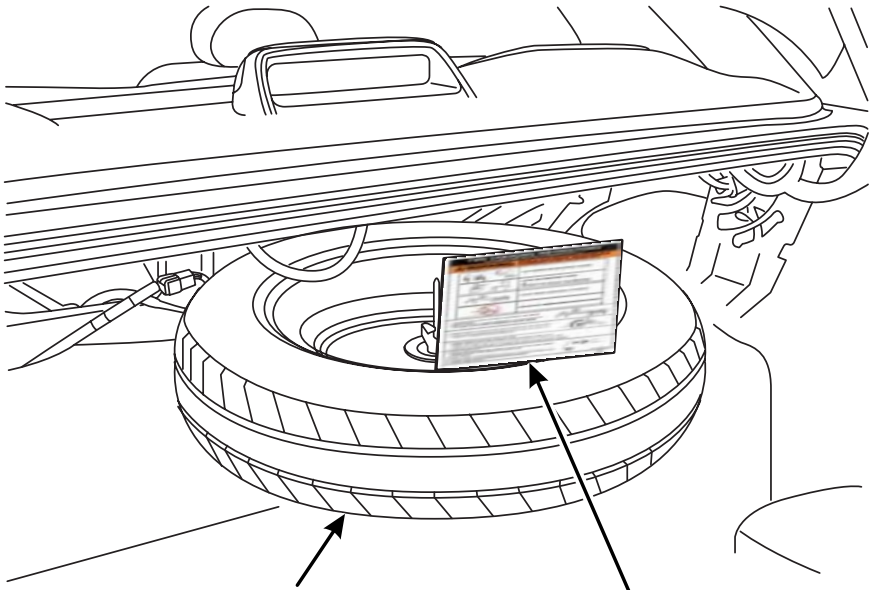


FIGURE 4

2. Install the spare tire cover (if equipped) and/or the right quarter trim panel, if removed.

CPR © 2000 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
07/00