• **ENGINE—"MISS" NOISE FROM EXHAUST—UPDATED EXHAUST Y-PIPE AVAILABLE—VEHICLES EQUIPPED WITH 5.4L OR 6.8L ENGINE—BUILT THROUGH 9/10/2000** • **EXHAUST—"MISS" NOISE FROM EXHAUST—UPDATED EXHAUST Y-PIPE AVAILABLE—VEHICLES EQUIPPED WITH 5.4L OR 6.8L ENGINE—BUILT THROUGH 9/10/2000** • **NOISE— "MISS" NOISE FROM EXHAUST—UPDATED EXHAUST Y-PIPE AVAILABLE—VEHICLES EQUIPPED WITH 5.4L OR 6.8L ENGINE—BUILT THROUGH 9/10/2000**	**Article No. 01-1-3**

FORD: 2000-2001 EXCURSION, F SUPER DUTY

ISSUE

Some vehicles may exhibit a "miss" sound from the exhaust. This may be caused by the design of the exhaust Y-pipe which can cause a "miss" like sound known as impingement.

ACTION

Replace the Y-pipe with updated design to reduce "miss" sound and update the calibration of the Powertrain Control Module (PCM). Refer to the following Service Procedure for details.

SERVICE PROCEDURE

REMOVAL OF OLD Y-PIPE

1. Raise the vehicle on a hoist.
2. Disconnect the heated oxygen sensor electrical connections and transfer both heated oxygen sensors to the new Y-pipe. Apply a small amount of Ford Anti-Seize Compound (F6AZ-9L494-AA) (or equivalent meeting Ford specification ESE-M12A-A) to the threads on both oxygen sensors.
3. Remove the LH and RH nuts connecting the Y-pipe to the exhaust manifolds.
4. Remove the three (3) nuts which attach the Y-pipe to the catalytic converter and discard the gasket.

INSTALLATION OF NEW Y-PIPE

Refer to the appropriate model year Workshop Manual section 309-00 for installation instructions and specifications.

1. Position the new Y-pipe (1C3Z-5246-AA).
2. Install the new flange gasket (F6TZ-5C226-BA) and three (3) nuts.
3. Install the two (2) nuts on both the right and left side Y-pipe-to-exhaust manifold connections.
4. Connect the heated oxygen sensor electrical connections.
5. Lower the vehicle.
6. Reprogram the PCM with updated calibration. Refer to the following PCM Calibration Information Chart.

Copyright © 2001 Ford Motor Company

PCM CALIBRATION INFORMATION							
Application	Old Part Number (-12A650-)	Old Tear Tag	New Part Number (-12A650-)	New Tear Tag	Old Calibration	New Calibration	NGS/WDS Qualifier
2000 F-250/350, 5.4L, 4R100, Fed.	YC3F-LE	UPU0	YU7Z-BAA	CPY4	0F714NOA11	0F714NOA11	N/A, Use WDS
2000 F-250/350, 5.4L, M5HDW, Fed.	YC3F-MD	RQH0	YU7Z-BBA	LMP3	0F714P0A10	0F714P0A10	N/A, Use WDS
2000 F-250/350, 5.4L, 4R100, Cal.	YC3F-KE	TXU0	YU7Z-BCA	FVR4	0F714D0B11	0F714D0B11	N/A, Use WDS
2000 F-450/550, 6.8L, 4R100, 50S	YC3F-ACE	JDT0	YU7Z-BDA	KWQ4	0F718N0511	0F718N0511	N/A, Use WDS
2000 F-450/550, 6.8L, 4R100, 50S, PTO	YC3F-XE	EUA0	YU7Z-BEA	OVD4	0F717N0511	0F717N0511	N/A, Use WDS
2000 F-250/350, 6.8L, 4R100, Fed.	YC3F-ADE	SPU0	YU7Z-BFA	FDA4	0F718P0A11	0F718P0A11	N/A, Use WDS
2000 F-250/350, 6.8L, 4R100, Fed. PTO	YC3F-YE	OEM0	YU7Z-BGA	KND4	0F717P0A11	0F717P0A11	N/A, Use WDS
2000 F-250/350, 6.8L, 4R100 Cal/50S/Fleet, CMS	YC3F-AFE	UTH0	YU7Z-BJA	QDE4	0F718R0B11	0F718R0B11	N/A, Use WDS
2000 F-250/350, 6.8L, 4R100, Cal/50S, PTO, CMS	YC3F-ZE	DXX0	YU7Z-BKA	QUM4	0F717R0B11	0F717R0B11	N/A, Use WDS
2000 F-250/350, 6.8L, 4R100, Cal, CMS, EVR, DPFE	YC3F-ABE	AVD0	YU7Z-BLA	WKR4	0F718C0B11	0F718C0B11	N/A, Use WDS
2000 F-250/350, 6.8L, 4R100, Cal, PTO, CMS, EVR, DPFE	YC3F-VE	QQX0	YU7Z-BMA	FID4	0F717C0B11	0F717C0B11	N/A, Use WDS
2000 F-350, 6.8L, 4R100, Cal/50S Fleet, CMS	YC3F-AGE	GNU0	YU7Z-BNA	RSJ4	0F718T0B11	0F718T0B11	N/A, Use WDS
2000 F-350, 6.8L, 4R100, Cal/50S Fleet, PTO, CMS	YC3F-AAE	OC00	YU7Z-BPA	HKI4	0F717T0B11	0F717T0B11	N/A, Use WDS
2000 F-450, 6.8L, M5HDW, 50S	YC3F-AJE	JFO0	YU7Z-BRA	KGG4	0F728U0511	0F728U0511	N/A, Use WDS
2000 F-250/350, 6.8L, M5HDW, Fed.	YC3F-AKE	IHH0	YU7Z-BSA	DRC4	0F728V0A11	0F728V0A11	N/A, Use WDS
2000 F-250/350, 6.8L, M5HDW, Cal., CMS, EVR, DPFE	YC3F-AHE	ZIG0	YU7Z-BTA	ZLG4	0F728AOB11	0F728AOB11	N/A, Use WDS
2000 Excursion, 5.4L, 4R100, Cal., CMS, EVR, DPFE	YC3F-TE	SGZ0	YU7Z-BUA	EKG4	0L114DOB11	0L114DOB11	N/A, Use WDS
2000 Excursion, 5.4L, 4R100, Fed.	YC3F-UE	EGP0	YU7Z-BVA	HDA4	0L114NOA11	0L114NOA11	N/A, Use WDS
2000 Excursion, 6.8L, 4R100, Cal., CMS, EVR, DPFE	YC3F-ALE	XYB0	YU7Z-BXA	MXH4	0L118DOB11	0L118DOB11	N/A, Use WDS

Application	Old Part Number (-12A650-)	Old Tear Tag	New Part Number (-12A650-)	New Tear Tag	Old Calibration	New Calibration	NGS/WDS Qualifier
2000 Excursion, 6.8L, 4R100, Fed.	YC3F-AME	CGD0	YU7Z-BYA	FXU4	0L118NOA11	0L118NOA11	N/A, Use WDS
2001 F-250/350, 5.4L, 4R100, Fed.	1C3F-EB	ZUC0	1C3Z-BAA	JXA1	1F714NOA05	1F714NOA15	N/A, Use WDS
2001 F-250/350, 5.4L, M5HDW, Fed.	1C3F-HB	AGL0	1C3Z-CAA	NLN1	1F724POA05	1F724POA15	N/A, Use WDS
2001 F-250/350, 5.4L, 4R100, Cal.	1C3F-DB	XQY0	1C3Z-DAA	YFN1	1F714DOB05	1F714DOB15	N/A, Use WDS
2001 F-350, 5.4L, 4R100, Cal.	1C3F-AB	KNL0	1C3Z-EAA	KTK1	1F714N0B05	1F714N0B15	N/A, Use WDS
2001 F-450/550, 6.8L, 4R100, 50S	1C3F-LC	ICB0	1C3Z-GAA	YRV2	1F718NO510	1F718NO515	N/A, Use WDS
2001 F-450/550, 6.8L, 4R100, 50S, PTO	1C3F-AGC	CVO0	1C3Z-HA	TNA2	1F717NO510	1F717NO515	N/A, Use WDS
2001 F-250/350, 6.8L, 4R100, Fed.	1C3F-MC	IWG0	1C3Z-JA	RTJ2	1F718POA10	1F718POA15	N/A, Use WDS
2001 F-250/350, 6.8L, 4R100, Fed., PTO	1C3F-AHC	NEH0	1C3Z-KA	FXK2	1F717POA10	1F717POA15	N/A, Use WDS
2001 F-250/350, 6.8L, 4R100, Cal/50S/Fleet	1C3F-NC	NEN0	1C3Z-MAA	QMB2	1F718ROB10	1F718ROB15	N/A, Use WDS
2001 F-250/350, 6.8L, 4R100, Cal/50S/Fleet, PTO	1C3F-AJC	AZJ0	1C3Z-NAA	HFH2	1F717ROB10	1F717ROB15	N/A, Use WDS
2001 F-250/350, 6.8L, 4R100, Cal.	1C3F-KC	ZYV0	YU7Z-ARA	BET2	1F718COB10	1F718COB15	N/A, Use WDS
2001 F-250/350, 6.8L, 4R100, Cal., PTO	1C3F-AFC	IBF0	YU7Z-ATA	BJG2	1F717COB10	1F717COB15	N/A, Use WDS
2001 F-350, 6.8L, 4R100, Cal/50S/Fleet	1C3F-PC	LKJ0	1C3Z-SA	KPA2	1F718TOB10	1F718TOB15	N/A, Use WDS
2001 F-350, 6.8L, 4R100, Cal/50S/Fleet PTO	1C3F-AKC	AZK0	1C3Z-TA	LQY2	1F717TOB10	1F717TOB15	N/A, Use WDS
2001 F-450/550, 6.8L, M5HDW, 50S	1C3F-UB	DNJ0	1C3Z-UAA	UMM1	1F728U0505	1F728U0515	N/A, Use WDS
2001 F-250/350, 6.8L, M5HDW, Fed.	1C3F-VB	DWE0	1C3Z-VA	JBK1	1F728VOA05	1F728VOA15	N/A, Use WDS
2001 F-250/350, 6.8L, M5HDW, Cal.	1C3F-TB	GMY0	YU7Z-ASA	SBD1	1F728AOB05	1F728AOB15	N/A, Use WDS
2001 Excursion, 5.4L, 4R100, Cal.	1C3F-FB	ESL0	1C3Z-YA	TRC1	1L114DOB05	1L114DOB15	N/A, Use WDS
2001 Excursion, 5.4L, 4R100, Fed.	1C3F-GB	NNA0	1C3Z-ZAA	RGC1	1L114NOA05	1L114NOA15	N/A, Use WDS
2001 Excursion, 6.8L, 4R100, Cal.	1C3F-RC	NNE0	YU7Z-AUA	ANV2	1L118DOB10	1L118DOB15	N/A, Use WDS
2001 Excursion, 6.8L, 4R100, Fed.	1C3F-SC	MMG0	1C3Z-ABA	YTY2	1L118NOA10	1L118NOA15	N/A, Use WDS

Article No. 01-1-3 Cont'd.

Obtain an Authorized Modifications Decal (FPS 8262 - obtainable through DOES II, 25/pkg) and list the date, dealer number, and summary of modifications performed. Select a prominent place adjacent to the Vehicle Emission Control Information Decal suitable for installing the Authorized Modifications Decal. Clean the area, install the decal, and cover it with a clear plastic decal shield.

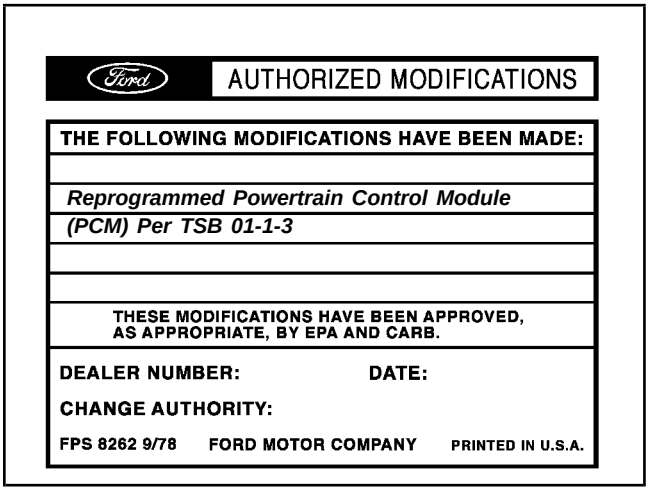

PART NUMBER	PART NAME
1C3Z-5246-AA	Exhaust Y-Pipe
F6TZ-5C226-BA	Flange Gasket
F6AZ-9L494-AA	Anti-Seize Compound

OTHER APPLICABLE ARTICLES: NONE

WARRANTY STATUS: Eligible Under The Provisions Of Bumper To Bumper Warranty Coverage And Emissions Warranty Coverage

OPERATION	DESCRIPTION	TIME
010103A	Replace Y-Pipe (Includes Time To Reprogram PCM)	1.0 Hr.

DEALER CODING

BASIC PART NO.	CONDITION CODE
5246	42

OASIS CODES: 403000, 497000, 702000, 702100