EMISSIONS LABEL REPLACEMENT

AFFECTED VEHICLES: **CERTAIN 1997-2000 ECONOLINE WITH 5.4L AND 6.8L ENGINES AND 50-STATE CERTIFICATION**

SERVICE PROCEDURE

1. Open the hood and locate the emissions label on the upper radiator support. See Figure 1.

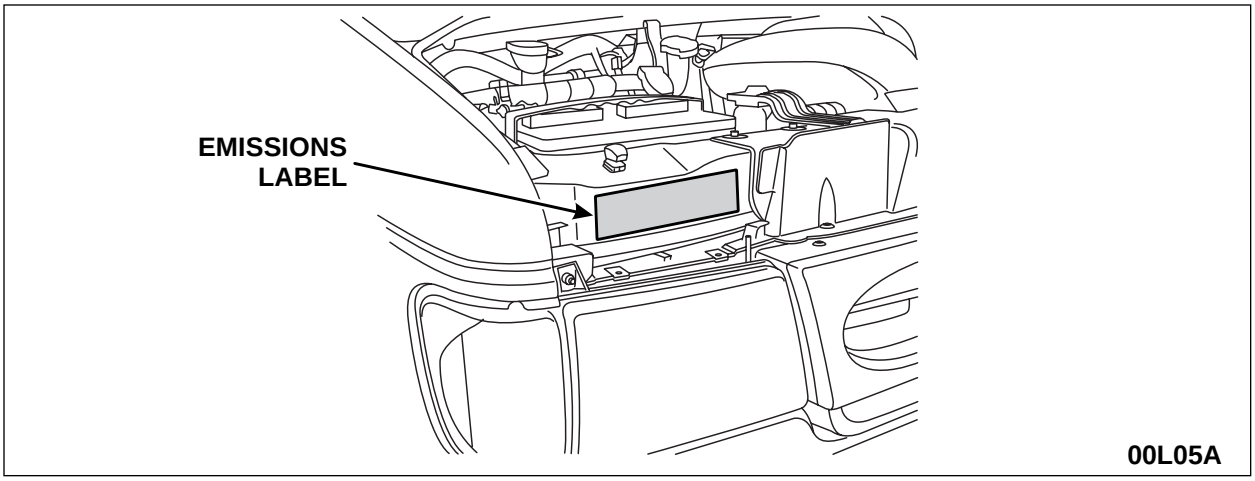

FIGURE 1

2. Clean the existing label using the supplied alcohol wipe or isopropyl alcohol and a clean rag.
3. Peel the backing off the new label and apply it directly over the existing label.
4. Close the hood.
5. Remove the engine cover from inside the vehicle.
6. Locate and clean the existing emissions label located on the right valve cover. See Figure 2.

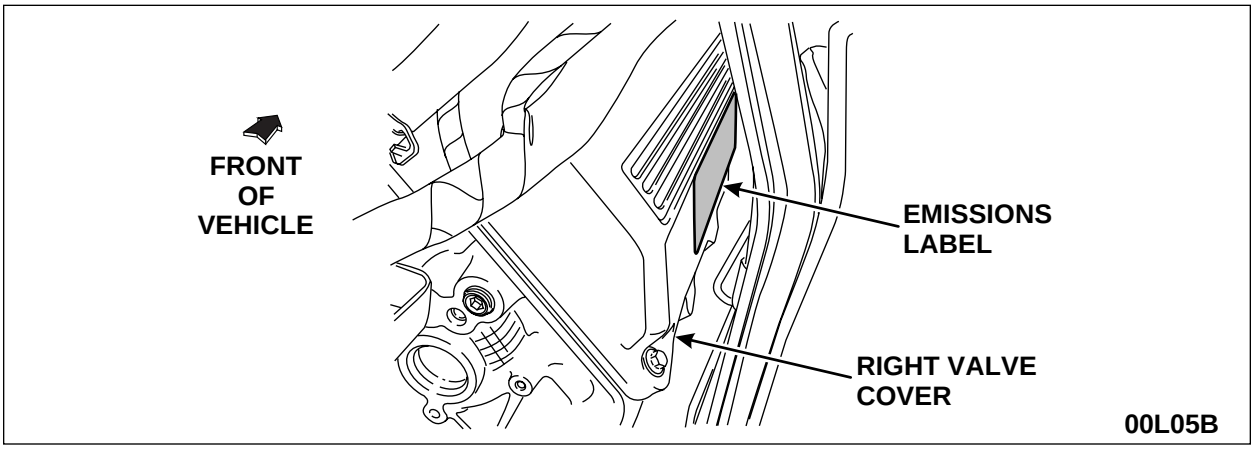

FIGURE 2

7. Peel the backing off the new label and apply it directly over the existing label.
8. Install the engine cover.

CPR © 2000 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
11/00