


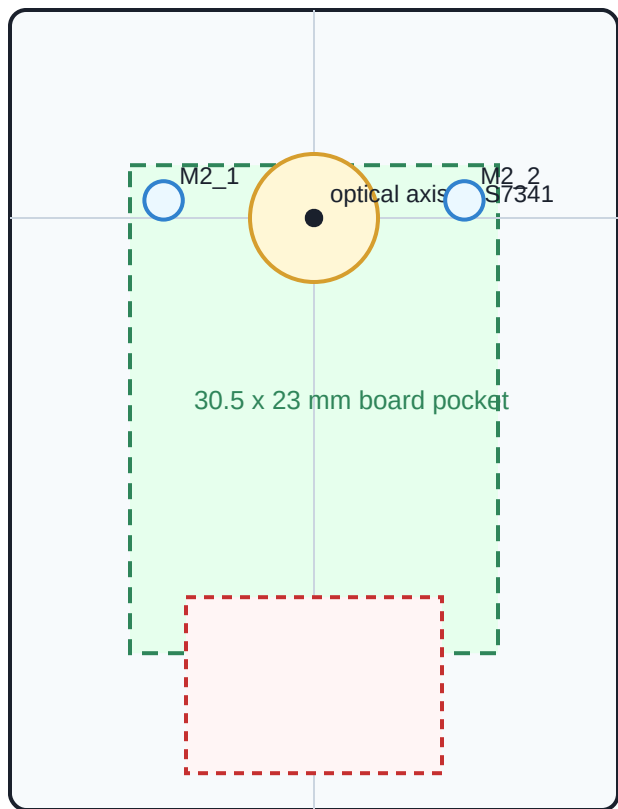

AS7341 C-mount sensor holder

View: rear sensor plate, looking along optical axis

Gold circle: 8 mm optical bore centered on AS7341 aperture

Green dashed rectangle: Waveshare 30.5 x 23 mm breakout + 0.8 mm clearance

Blue holes: two M2 clearance holes from vendor drawing

Red dashed notch: PH2.0 6-pin cable/connector relief

C-mount side: OpenHI 24.8 mm female receiver, 0.8 mm pitch thread