



C12880MA 25 mm pilot holder - dimensional intent

Optical axis runs left to right. The pilot is smooth and is not a 1-32 thread.

Side view

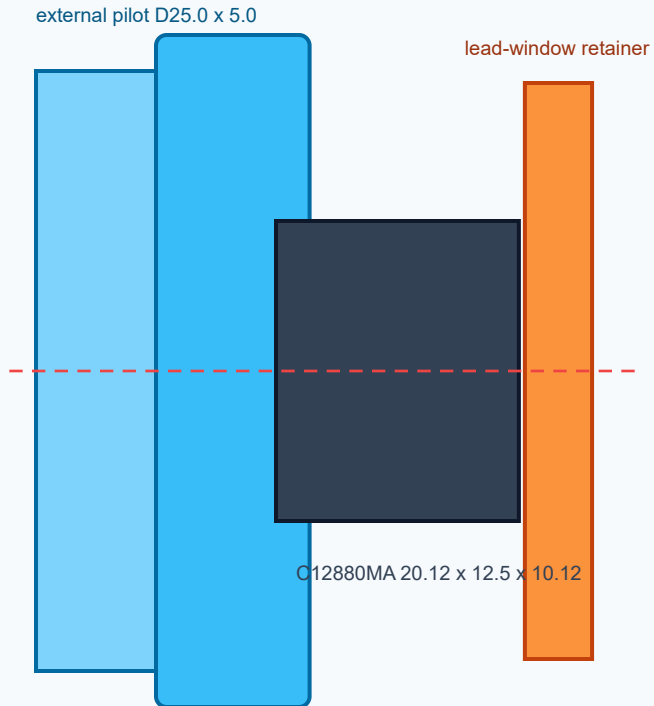

Pilot/front face

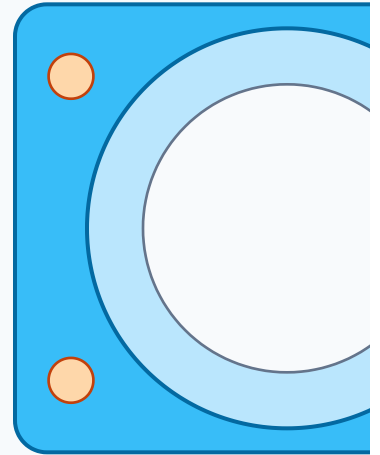

Critical dimensions and constraints

- Sensor locating pocket: 20.52 x 12.90 mm (0.20 mm clearance per side)
- Final sensor-side aperture: D5.0 mm; official entrance opening: D3.2 mm
- Slit: 0.05 x 0.5 mm; package center shifted -0.5 mm so slit meets pilot axis
- Retainer: 32 x 24 x 2.8 mm with 18 x 9.5 mm lead window
- Four M2.5 positions: Y +/-13.5 mm, Z +/-9.5 mm
- Print in insulating polymer; do not electrically short the conductive sensor case