


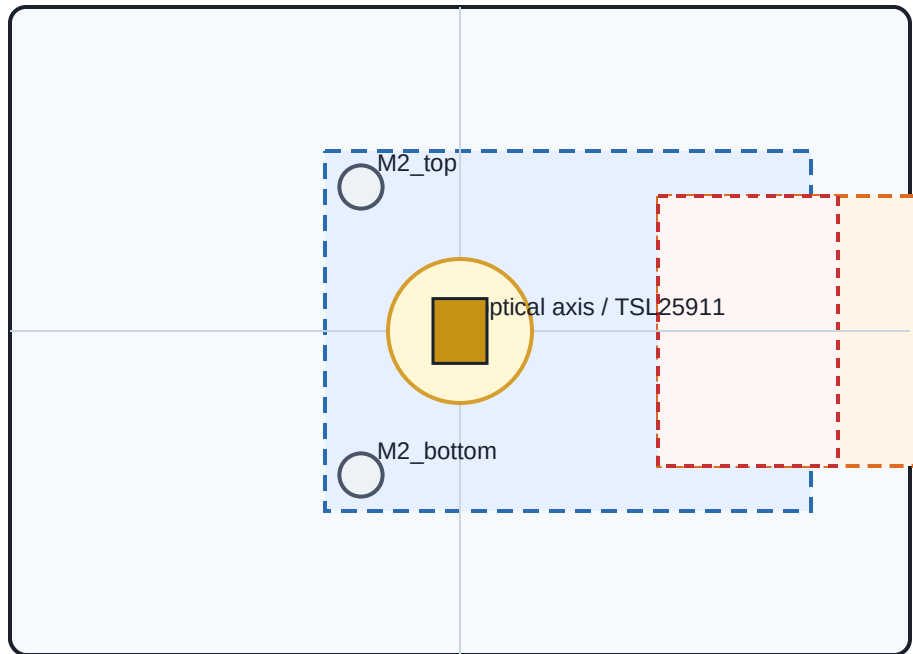

TSL25911 C-mount intensity sensor holder

View: rear tray, looking along optical axis

Gold rectangle: TSL25911 package/window centered on axis

Blue dashed rectangle: 20 x 27 mm module tray

Gray holes: two M2 holes from the sensor-side short edge

Red dashed slot: XH2.54 5P socket body clearance on connector edge

Orange slot: same connector zone opened fully to holder edge for wires

Socket/wire relief starts 2.0 mm farther toward the sensor-side edge for deeper PCB seating

Socket X-depth: 2.25 mm PCB sink + 6.5 mm net = 8.75 mm

C-mount side: nominal 25.4 mm female thread, 25.0 mm pilot/root